

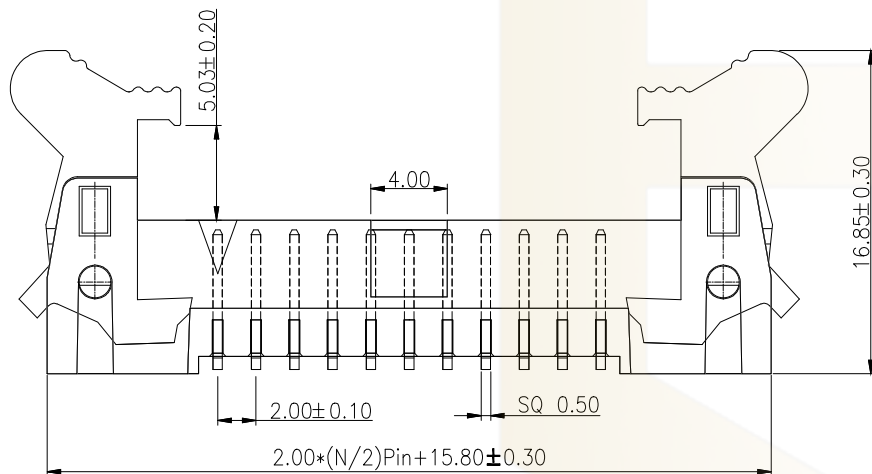
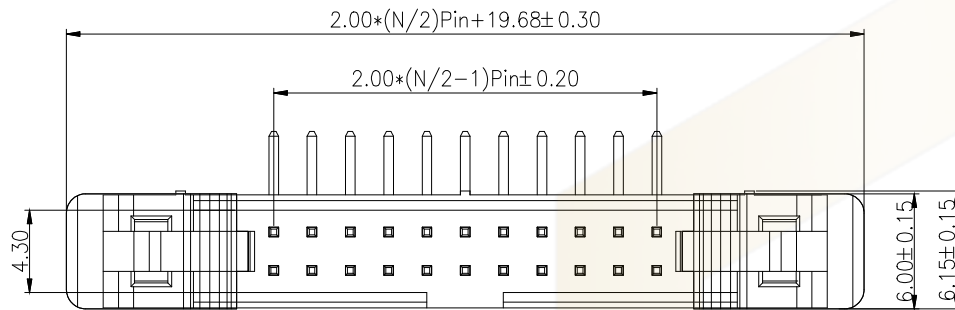


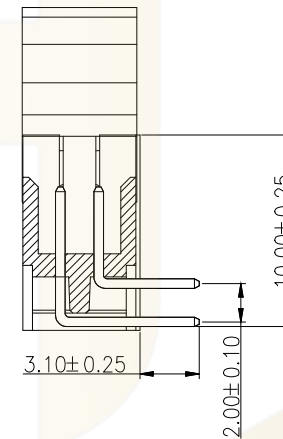

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

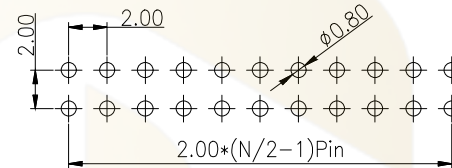

SPECIFICATIONS
Rated Current:1.5AMP
Contact Resistance:20mΩ Max
Withstand Voltage:500V AC/DC
Insulation Resistance:800MΩ Min
Operation Temperature:-40°c to +105°c

Contact Material:Brass
Contact Plating:Au or Sn Over Ni
Insulator Material:Polyester(UL94V-0)
Max.Processing Temp:
(PBT)245°C±5°C For 5~10 Second
(PA6T/LCP)260°C±5°C For 5~10 Second

Ordering Information

HC-NJ 200 - * - N - * - * - * - *

No. of Rows
2=Dual Row

No. of Pins
02~40Pin

Type
2=02Pin
4=04Pin
8=08Pin
16=16Pin

Length
(mm)

Contact Plating
G0:Gold Flash
G1:1u" Gold
G2:3u" Gold
G3:5u" Gold
G4:10u" Gold
G5:15u" Gold
G6:30u" Gold
S0:Gold Flash/Tin
S1:Tin

Color
B=Black
G=Grey

Latch Type
L=Long Latch
S=Short Latch
M=Middle Latch
N= Without Latch

			GENERAL TOLERANCE		制 图	深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO., LTD			
			DIM	TOL	DRAWING				
			X.X	±0.30	审 核	产品名称	2.00 牛角 弯针 (中耳扣)	版本	A
			X.XX	±0.20	批 准	产品料号	HC-NJ200-2-N-W-16.85-XX-X-M	单 位	mm
1	初版发行		X.XXX	±0.10	APPROVAL	PART NO.		页 次	1/1
序号 No.	变更内容 MODIFY CONTENT	日期 MODIFY DATE	Angle	±3.0°	投 影 Projection	材 料 MATERIAL			