
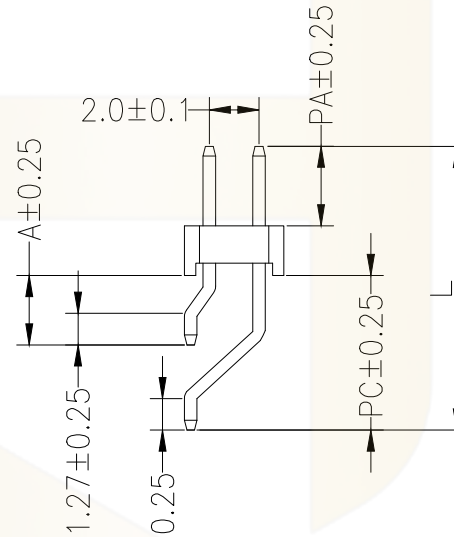
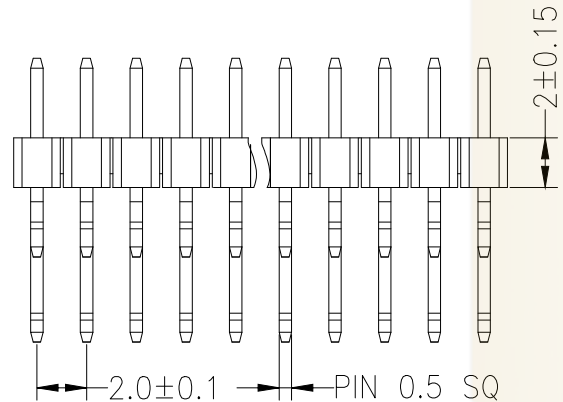
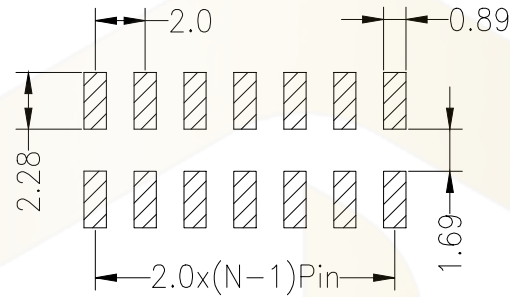


Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE ± 0.05)

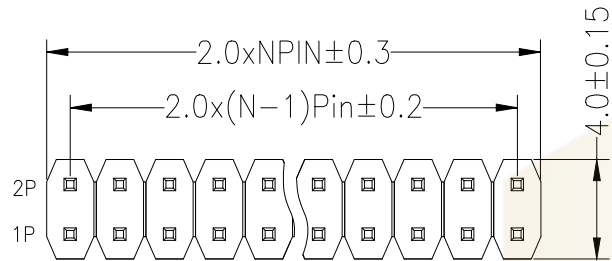

SPECIFICATIONS

Rated Current:1.5AMP
Contact Resistance:20m Ω Max
Withstand Voltage:500V AC/DC
Insulation Resistance:1000M Ω Min
Operation Temperature:-40°C to +105°C

Contact Material:Brass
Contact Plating:Au or Sn Over Ni
Insulator Material:Polyester(UL94V-0)
Standard: PA6T
Max.Processing Temp: 230°C for 30-60 seconds
(260°C for 5 seconds)

Dimension antitheses list

ITEM	PA	A	PC	L
Standard	4.00	3.40	6.60	12.60
Alternate				

Ordering Information

PZ 200 - * - N - * - * - **


No.of Rows
1=Single Row
2=Dual Row

No.of Pins
2-40Pin

Type
2=直针
3=弯针
S=立贴
WS=卧贴

Length
(产品长度)

Contact Plating
G0:Gold Flash
G1:1u" Gold
G2:3u" Gold
G3:5u" Gold
G4:10u" Gold
G5:15u" Gold
G6:30u" Gold
S0:Gold Flash/Tin
S1:Tin



			GENERAL TOLERANCE		制 图 DRAWING	深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO.,LTD			
			DIM	TOL	审 核 CHECK				
			X. X	±0.30	批 准 APPROVAL	产品名称 TITLE	2.00双排 排针 卧贴(塑高2.0)	版 本 REV.	A
			X. XX	±0.20	比 例 SCALE	产品料号 PART NO.	PZ200-2-N-WS-2.0-XX (L12.6)	单 位 UNITS	mm
1	初版发行		X. XXX	±0.10	投 影 Projection	材 料 MATERIAL		页 次 SHEET	1/1
序号 No.	变更内容 MODIFY CONTENT	日期 MODIFY DATE	Angle	±3.0°					