

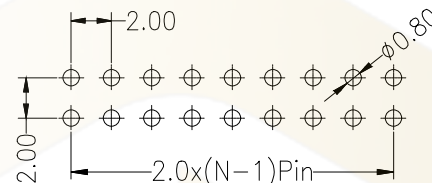


Recommended P.C.B Layout(Top Side)  
(PCB BOARD TOLERANCE±0.05)

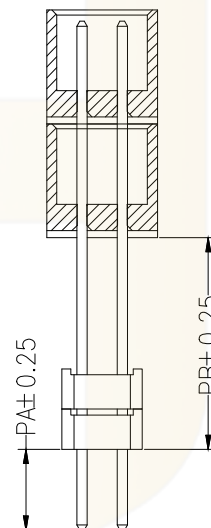

SPECIFICATIONS  
Rated Current:1.5AMP  
Contact Resistance:20mΩ Max  
Withstand Voltage:400V AC/DC  
Insulation Resistance:800MΩ Min  
Operation Temperature:-40°C to +105°C

Contact Material:Brass  
Contact Plating:Au or Sn Over Ni  
Insulator Material:Polyester(UL94V-0)  
Standard: PA6T  
Max.Processing Temp: 260°C±5°C 5S

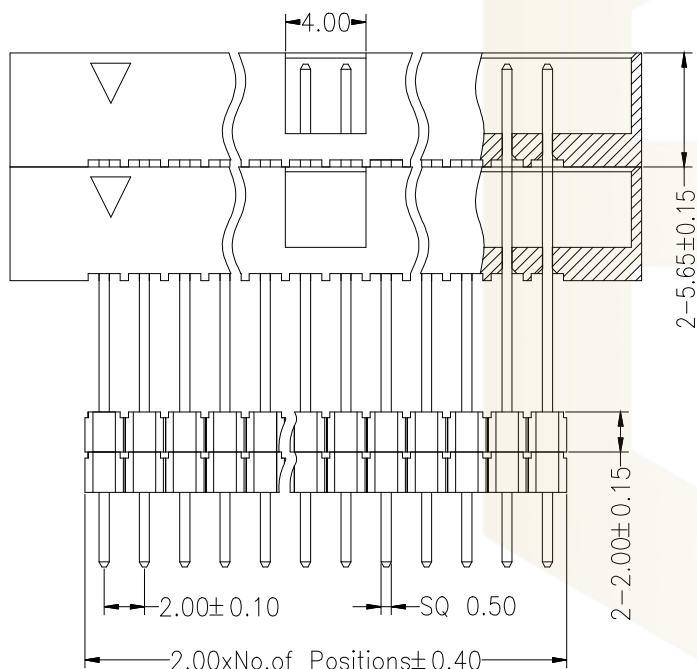

| Dimension antitheses list |      |       |
|---------------------------|------|-------|
| ITEM                      | PA   | PB    |
| Alternate                 | 4.00 | 14.95 |

### Ordering Information

HC-JN 200 - \* - Z - \* - \* - \*\* - 2DP

No.of Rows  
1=Single Row  
2=Dual Row  
No.of Pins  
2-40Pin  
Type  
Z=塑料  
N=尼龙  
S=金属  
R=铜  
Length  
(mm)  
(mm)  
Contact Plating  
G0:Gold Flash  
G1:1u" Gold  
G2:3u" Gold  
G3:5u" Gold  
G4:10u" Gold  
G5:15u" Gold  
G6:30u" Gold  
S0:Gold Flash/Tin  
S1:1in

|           |                        |                   |                   |       |                                                                                       |                                                                                                                                                |                             |              |     |
|-----------|------------------------|-------------------|-------------------|-------|---------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------|--------------|-----|
|           |                        |                   | GENERAL TOLERANCE |       | 制 图<br>DRAWING                                                                        |  深圳市华灿天禄电子有限公司<br>ShenzhenhuacantianluELECTRONICS CO.,LTD |                             |              |     |
|           |                        |                   | DIM               | TOL   | 审 核<br>CHECK                                                                          |                                                                                                                                                |                             |              |     |
|           |                        |                   | X. X              | ±0.30 | 批 准<br>APPROVAL                                                                       | 产品名称<br>TITLE                                                                                                                                  | 简牛2.00 双排 双座 双塑 直排母         | 版 本<br>REV.  | A   |
| 1         | 初版发行                   |                   | X. XX             | ±0.20 | 比 例<br>SCALE                                                                          | 产品料号<br>PART NO.                                                                                                                               | HC-JN200-2-N-Z-14.95-XX-2DP | 单 位<br>UNITS | mm  |
|           |                        |                   | X. XXX            | ±0.10 | 投 影<br>Projection                                                                     | 材 料<br>MATERIAL                                                                                                                                |                             | 页 次<br>SHEET | 1/1 |
| 序号<br>No. | 变更内容<br>MODIFY CONTENT | 日期<br>MODIFY DATE | Angle             | ±3.0° |  |                                                                                                                                                |                             |              |     |