



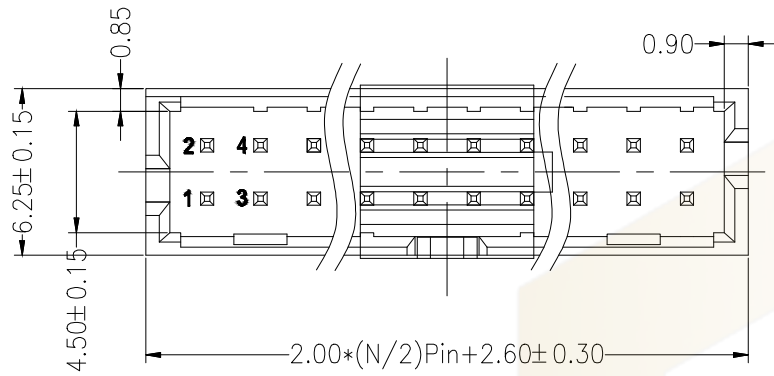

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

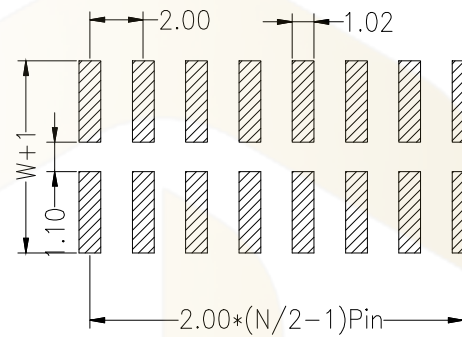

SPECIFICATIONS

Rated Current:1.5AMP

Contact Resistance:20mΩ Max

Withstand Voltage:400V AC/DC

Insulation Resistance:800MΩ Min

Operation Temperature:-40°C to +105°C



Contact Material:Brass

Contact Plating: Au or Sn Over Ni

Insulator Material:Polyester(UL94V-0)

Max.Processing Temp:

(PA6T/LCP/PA9T)260°C±5°C For 5~10 Second

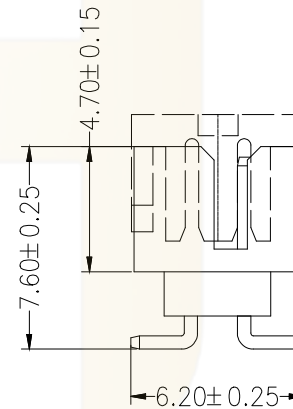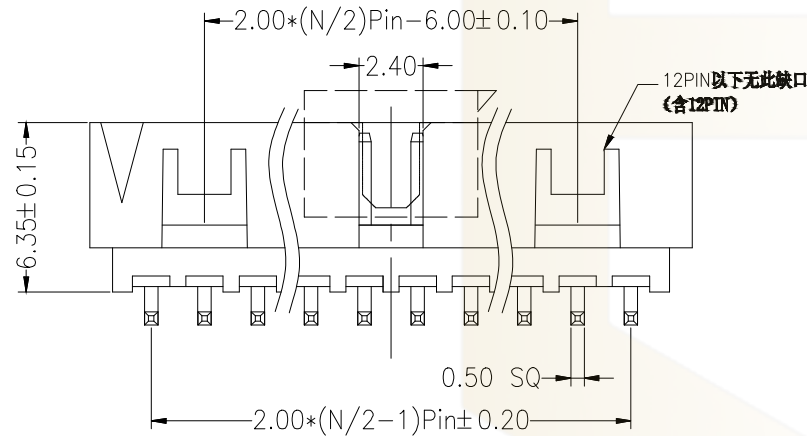

Ordering Information

JN 200 - * - N - * - * - **

No. of Rows
1=Single Row
2=Dual Row

No. of Pins
2=40Pin

Type
2=塑料
4=陶瓷
5=金属
6=硅胶

Length
(mm)

Contact Plating
G0:Gold Flash
G1:1u" Gold
G2:3u" Gold
G3:5u" Gold
G4:10u" Gold
G5:15u" Gold
G6:30u" Gold
S0:Gold Flash/Tin
S1:Tin



			GENERAL TOLERANCE	制 图 DRAWING	深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO.,LTD				
			DIM TOL	审 核 CHECK					
			X.X ±0.30	批 准 APPROVAL	产品名称 TITLE	简牛2.00 双排 排母 贴片	版 本 REV.	A	
1	初版发行		X.XX ±0.20	比 例 SCALE	产品料号 PART NO.	JN200-2-N-S-6.35-XX	单 位 UNITS	mm	
			X.XXX ±0.10	投 影 Projection	材 料 MATERIAL		页 次 SHEET	1/1	
序号 No.	变更内容 MODIFY CONTENT	日期 MODIFY DATE	Angle ±3.0°						