

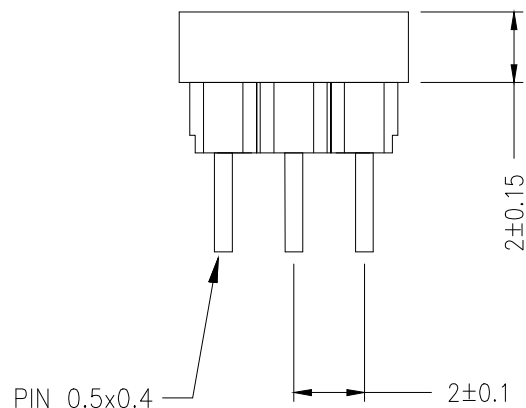
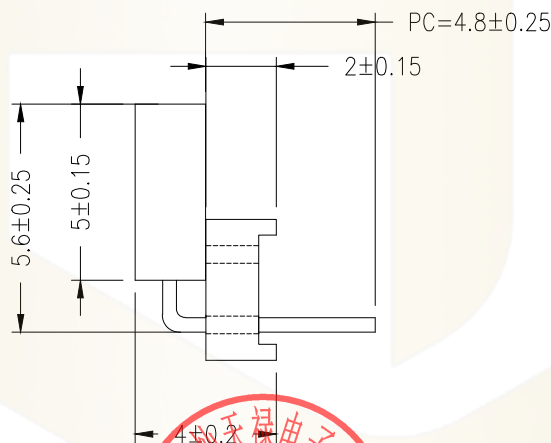


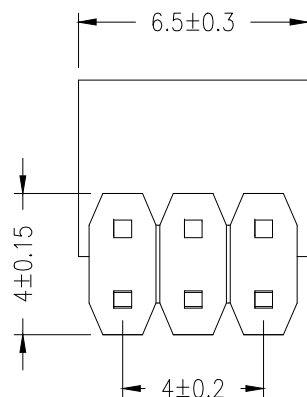

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)



SPECIFICATIONS

Rated Current:1.5AMP

Contact Resistance:20mΩMax

Withstand Voltage:500V AC/DC

Insulation Resistance:1000MΩMin

Operation Temperature:-40℃ to +105℃

Contact Material:Brass

Contact Plating:Au or Sn Over Ni

Insulator Material:Polyester(UL94V-0)

Standard: PA6T

Max.Processing Temp: 230℃ for 30-60 seconds
(260℃ for 10 seconds)

Ordering Information

PM 200 - * - N - W - * - ** - *LP													
No. of Rows 1=Single Row 2=Dual Row		No. of Pins 02-40Pin		Type Z=直针 B=弯针 S=立脚 W=弯脚		Length (Plastic) (mm)		Contact G0:Gold G1:1u" Gold G2:3u" Gold G3:5u" Gold G4:10u" Gold G5:15u" Gold G6:30u" Gold S0:Gold S1:Tin		Plating Flash Gold Gold Gold Gold Gold Gold Flash/Tin		1~5 Layer Of Plastic (附加层数)	

	GENERAL TOLERANCE		制图 DRAWING				
			审核 CHECK				
		DIM TOL	批准 APPROVAL	产品名称 TITLE	2.00单排 排母 弯针 塑高5.0 加一层塑胶	版本 REV.	A
1	初版发行	X.X ±0.30	比例 SCALE	产品料号 PART NO.	PM200-1-03-W-5.0-XX-1LP (PC4.8)	单位 UNITS	mm
序号 No.	变更内容 MODIFY CONTENT	X.XXX ±0.10	投影 Projection	材料 MATERIAL		页次 SHEET	1/1
	日期 MODIFY DATE	Angle ±3.0°					