
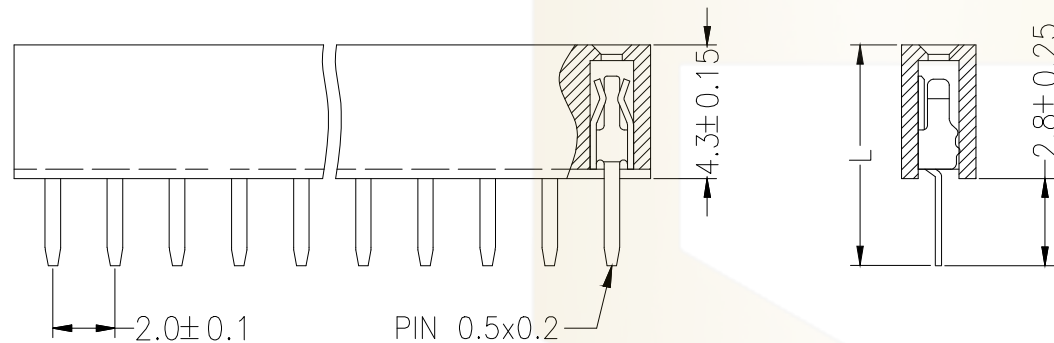
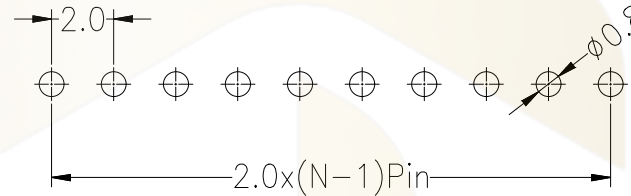


Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE ± 0.05)

SPECIFICATIONS

Rated Current:1.5AMP
Contact Resistance:20m Ω Max
Withstand Voltage:500V AC/DC
Insulation Resistance:1000M Ω Min
Operation Temperature:-40 $^{\circ}$ c to +105 $^{\circ}$ c

Contact Material:Brass
Contact Plating:Au or Sn Over Ni
Insulator Material:Polyester(UL94V-0)
Standard: PA6T
Max.Processing Temp: 230 $^{\circ}$ C for 30-60 seconds
(260 $^{\circ}$ C for 10 seconds)

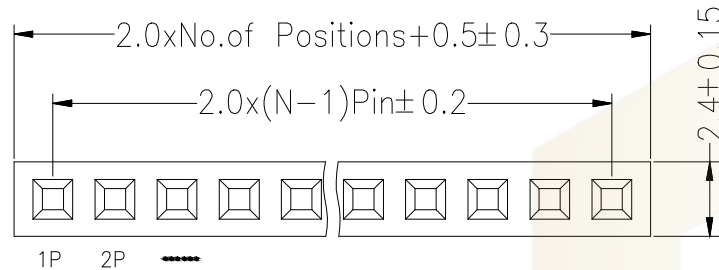

Ordering Information

PM 200 - * - N - Z - * - **

No.of Rows 1=Single Row 2=Dual Row	No.of Pins 2-40Pin	Type Z=直排 H=弯排 S=侧排	Length (Plastic) (mm)	Contact Plating G0:Gold Flash G1:1u" Gold G2:3u" Gold G3:5u" Gold G4:10u" Gold G5:15u" Gold G6:30u" Gold S0:Gold Flash/Tin S1:Tin
--	-----------------------	------------------------------	-----------------------------	--

			GENERAL TOLERANCE		制 图				
			DIM	TOL	DRAWING				
			X. X	± 0.30	审 核	产品名称	2.00单排 直排母(塑高4.3)	版 本	A
			X. XX	± 0.20	批 准	TITLE		REV.	
			X. XXX	± 0.10	APPROVAL	产品料号	PM200-1-N-Z-4. 3-XX(L7. 1)	单 位	mm
			Angle	$\pm 3.0^{\circ}$	SCALE	PART NO.		UNITS	
序号 No.	变更内容 MODIFY CONTENT	日期 MODIFY DATE	投 影		Projection	材 料		页 次	1/1
						MATERIAL		SHEET	