
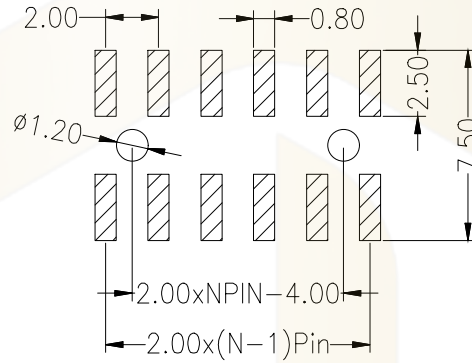


Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE ± 0.05)

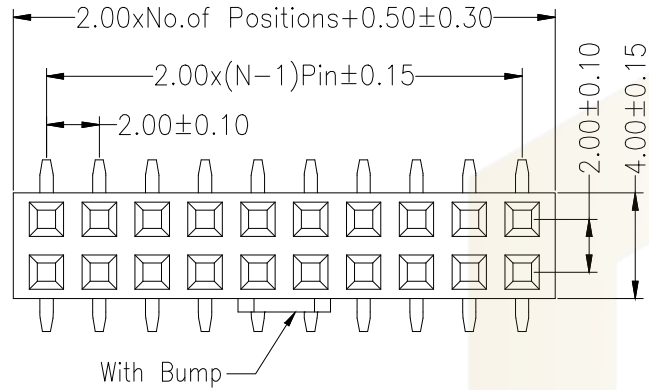

SPECIFICATIONS

Rated Current:1.5AMP

Contact Resistance:20m Ω Max

Withstand Voltage:500V AC/DC

Insulation Resistance:1000M Ω Min

Operation Temperature:-40°C to +105°C




Contact Material:Brass

Contact Plating:Au or Sn Over Ni

Insulator Material:Polyester(UL94V-0)

Standard: PA6T

Max.Processing Temp: 260°C $\pm 5^\circ\text{C}$ 5S

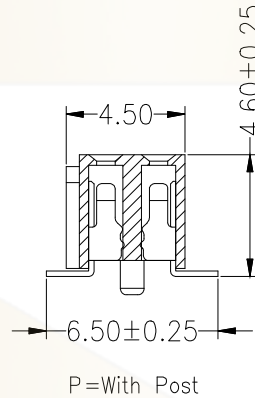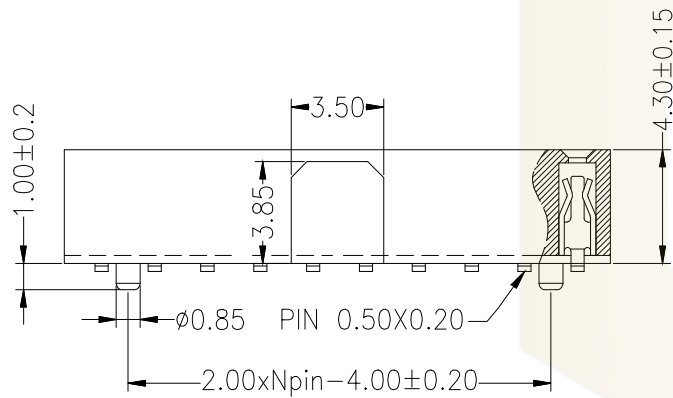

Ordering Information

PM 200	- *	- N	- S	- *	- BP	- **	- P
No. of Rows 1=Single Row 2=Dual Row	No. of Pins 2-40Pin	Type 2=直插 8=贴片 S=全贴 85=带板	Length (Plastic) (塑料)	Option Type BP=With Bump	Contact G0:Gold Flash G1:1u" Gold G2:3u" Gold G3:5u" Gold G4:10u" Gold G5:15u" Gold G6:30u" Gold S0:Gold Flash/Tin S1:Tin	Plating Flash Gold Gold Gold Gold Gold Gold Gold Flash/Tin Tin	Post (带柱)

GENERAL TOLERANCE			制图	深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO., LTD			
DIM TOL			审核				
X. X ± 0.30			批准	产品名称	2.00双排 排母 贴片 带凸台	版本	A
X. XX ± 0.20			APPROVAL	TITLE	(塑高4.3)	REV.	
X. XXX ± 0.10			比例	产品料号	PM200-2-N-S-4.3-BP-XX(L4.6)	单位	mm
Angle $\pm 3.0^\circ$			SCALE	PART NO.		UNITS	
序号	变更内容	日期	投影	材料		页次	1/1
No.	MODIFY CONTENT	MODIFY DATE	Projection	MATERIAL		SHEET	