
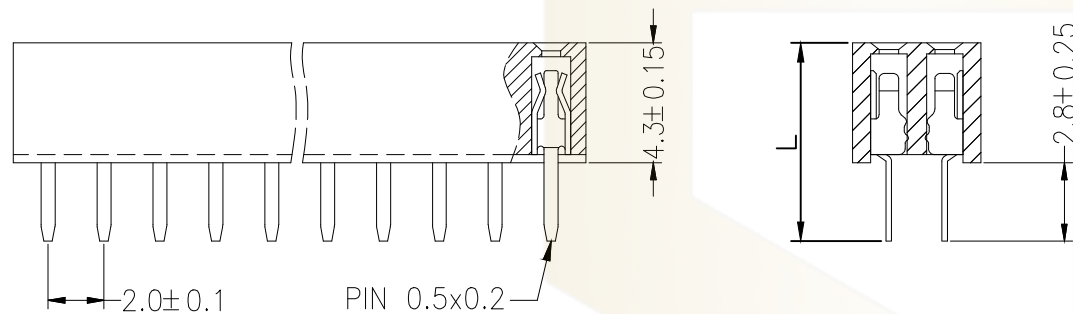
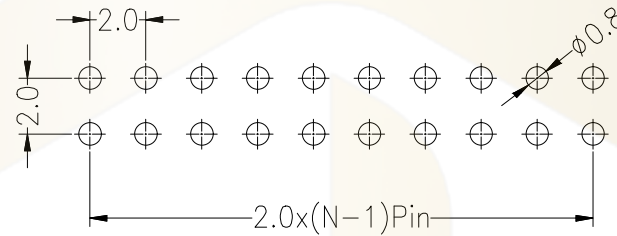


Contact Material:Brass
Contact Plating: Au or Sn Over Ni
Insulator Material: Polyester(UL94V-0)
Standard: PA6T
Max.Processing Temp: 230°C for 30-60 seconds (260°C for 10 seconds)

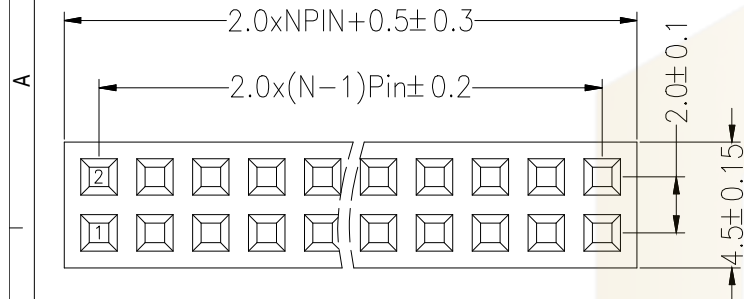

Ordering Information

PM 200 - * - N - Z - * - **

No. of Rows 1=Single Row 2=Double Row	No. of Pins 2=40Pin	Type 2=直插 8=弯插 S=立贴 HS=贴片	Length (Plastic) (塑壳)	Contact G0:Gold G1:1u" Gold G2:3u" Gold G3:5u" Gold G4:10u" Gold G5:15u" Gold G6:30u" Gold S0:Gold S1:Tin	Plating Flash Flash Flash Flash Flash Flash Flash/Tin
---	------------------------	---------------------------------------	-----------------------------	--	--

			GENERAL TOLERANCE		制 图 DRAWING		 深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO.,LTD						
			DIM TOL		审 核 CHECK								
			X.X ±0.30		批 准 APPROVAL		产品名称 TITLE		2.00双排 排母 直针 塑高4.3		版 本 REV.		A
			X.XX ±0.20		比 例 SCALE		产品料号 PART NO.		PM200-2-N-Z-4.3-XX(L7.1)		单 位 UNITS		mm
1 初版发行			X.XXX ±0.10		投 影 Projection 		材料 MATERIAL		页 次 SHEET		1/1		
序号 No.		变更内容 MODIFY CONTENT		日期 MODIFY DATE									