

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE ± 0.05)

SPECIFICATIONS

Rated Current:1.5AMP

Contact Resistance:20m Ω Max

Withstand Voltage:500V AC/DC

Insulation Resistance:1000M Ω Min

Operation Temperature:-40°C to +105°C




Contact Material:Brass

Contact Plating:Au or Sn Over Ni

Insulator Material:Polyester(UL94V-0)

Standard: PA6T

Max.Processing Temp: 230°C for 30-60 seconds
(260°C for 10 seconds)

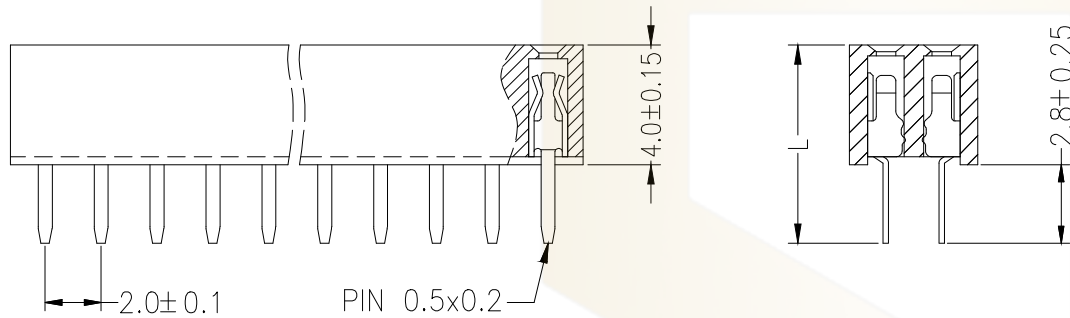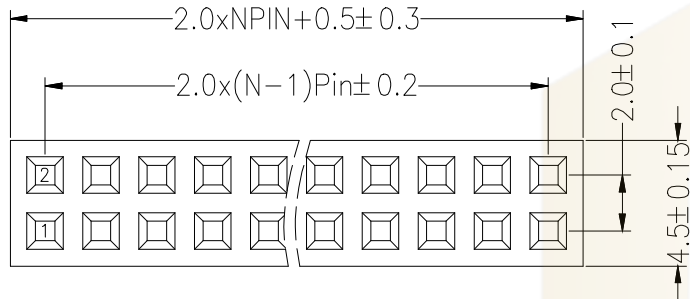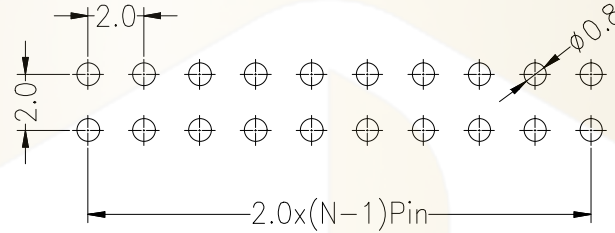

Ordering Information

PM 200 - * - N - Z - * - **

No. of Rows
1=Single Row
2=Dual Row
No. of Pins
2-40Pin
Type
Z=直针
S=弯针
L=带脚
Length
(Plastic)
(塑高)
Contact Plating
G0:Gold Flash
G1:1u" Gold
G2:3u" Gold
G3:5u" Gold
G4:10u" Gold
G5:15u" Gold
G6:30u" Gold
S0:Gold Flash/Tin
S1:Tin

			GENERAL TOLERANCE		制 图				
			DIM	TOL	审 核				
			X. X	± 0.30	批 准	产品名称	2.00双排 排母 直针 塑高4.0	版本	A
			X. XX	± 0.20	APPROVAL	TITLE		REV.	
			X. XXX	± 0.10	比 例	产品料号	PM200-2-N-Z-4.0-XX(L6.8)	单 位	mm
序号 No.	变更内容 MODIFY CONTENT	日期 MODIFY DATE	Angle	$\pm 3.0^\circ$	投 影 Projection	材料 MATERIAL		页 次 SHEET	1/1