
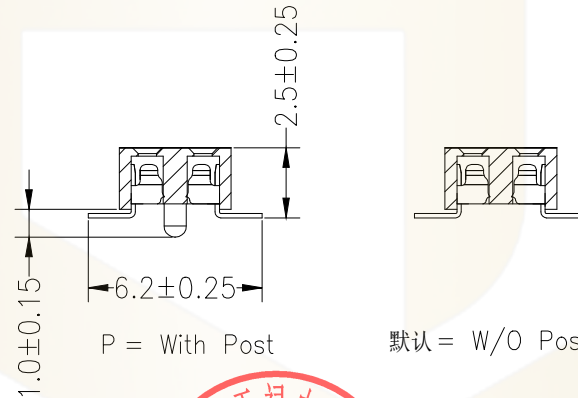
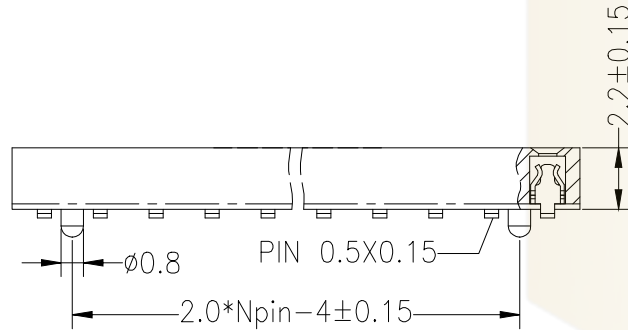
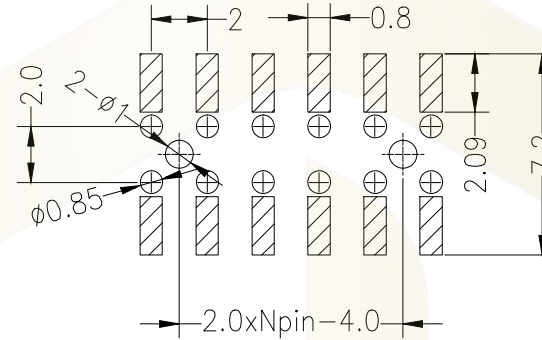


Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

SPECIFICATIONS

Rated Current:1.5AMP
Contact Resistance:20mΩ Max
Withstand Voltage:500V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:-40°c to +105°c

Contact Material:Phosphor Bronze
Contact Plating:Au or Sn Over Ni
Insulator Material:Polyester(UL94V-0)
Standard: PA6T
Max.Processing Temp: 230°C for 30-60 seconds
(260°C for 10 seconds)

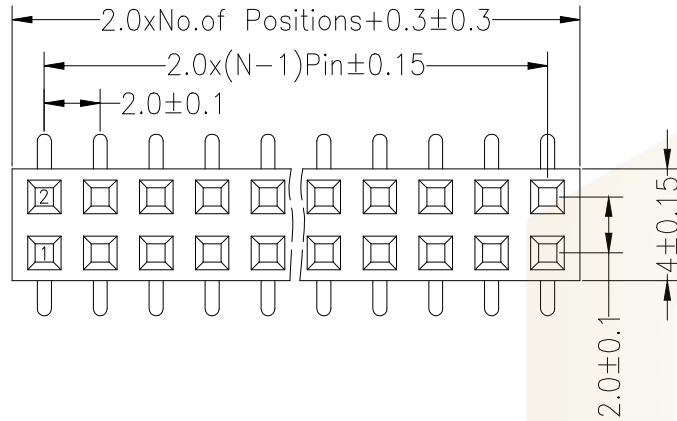

P = With Post

默认 = W/O Post

Ordering Information

PM	200	-	*	-	N	-	*	-	*	-	**	-	P
No. of Rows	No. of Pins	Type	Length (Plastic)	Contact Plating	Post								
1=Single Row	2=40Pin	2=11Pin	(mm)	G0:Gold Flash	(带柱)								
2=Dual Row		4=40Pin		G1:1u" Gold									
		5=20Pin		G2:3u" Gold									
		6=20Pin		G3:5u" Gold									
				G4:10u" Gold									
				G5:15u" Gold									
				G6:30u" Gold									
				S0:Gold Flash/Tin									
				S1:Tin									

			GENERAL TOLERANCE		制图	深圳市华灿天禄电子有限公司			
					DRAWING	ShenzhenhuacantianluELECTRONICS CO.,LTD			
			DIM	TOL	审核				
			X. X	±0.30	CHECK				
			X. XX	±0.20	批准	产品名称	2.00双排 排母 贴片	版本	A
			X. XXX	±0.10	APPROVAL	TITLE	塑高2.2	REV.	
			Angle	±3.0°	比例	产品料号	PM200-2-N-S-2.2-XX (L2.5)	单位	mm
					SCALE	PART NO.		UNITS	
					投影	材料		页次	1/1
					Projection	MATERIAL		SHEET	