

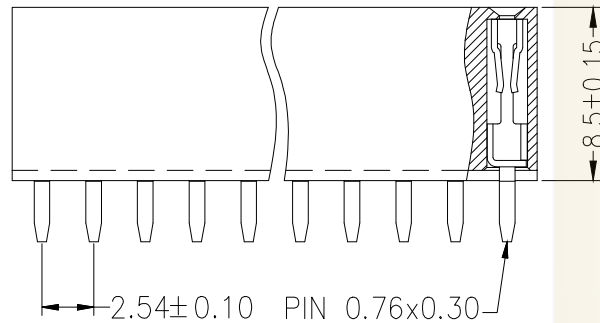
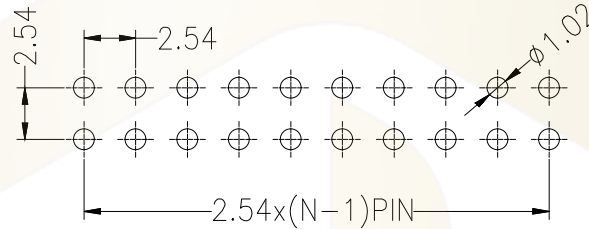


Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE ± 0.05)

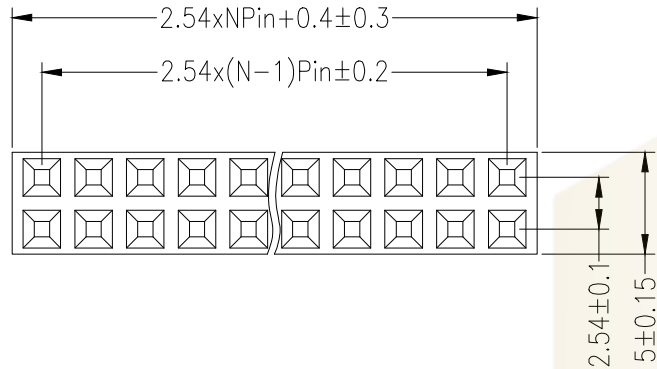

SPECIFICATIONS

Rated Current:3.0AMP

Contact Resistance:20m Ω Max

Withstand Voltage:1000V AC/DC

Insulation Resistance:1000M Ω Min

Operation Temperature:-40 $^{\circ}$ c to +105 $^{\circ}$ c

Contact Material:Copper Alloy

Contact Plating:Au Over Ni

Insulator Material:Polyester(UL94V-0)

Resistance To Soldering Heat:

245 $^{\circ}$ C $\pm 5^{\circ}$ C, 10s(PBT insulator)

260 $^{\circ}$ C $\pm 5^{\circ}$ C, 10s(PA6T&LCP insulator)

Ordering Information

PM 254 - * - N - Z - * - ** - LPT						
No. of Rows 1=Single Row 2=Dual Row	No. of Pins 02-40Pin	Type Z=直针 R=弯针 S=立轴	Length (Plastic) (mm)	Contact Plating G0:Gold Flash G1:1u" Gold G2:3u" Gold G3:5u" Gold G4:10u" Gold G5:15u" Gold G6:30u" Gold	Leak-Proof Tin (防漏锡)	

GENERAL TOLERANCE			制图 DRAWING		深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO., LTD			
DIM TOL			审核 CHECK		产品名称 TITLE	2.54双排 排母 直针 防漏锡(塑高8.5)	版本 REV.	A
X.X ± 0.30			批准 APPROVAL		产品料号 PART NO.	PM254-2-N-Z-8.5-XX-LPT(L11.5)	单位 UNITS	mm
X.XX ± 0.20			比例 SCALE		材料 MATERIAL		页次 SHEET	1/1
X.XXX ± 0.10			投影 Projection					
Angle $\pm 3.0^{\circ}$								
序号 No.	变更内容 MODIFY CONTENT	日期 MODIFY DATE						