

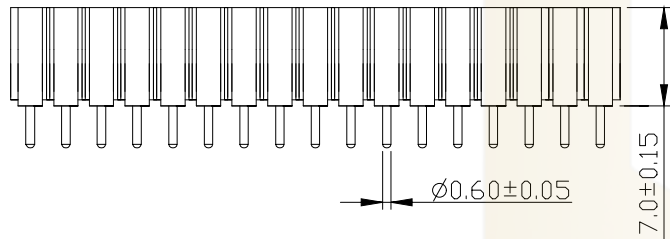
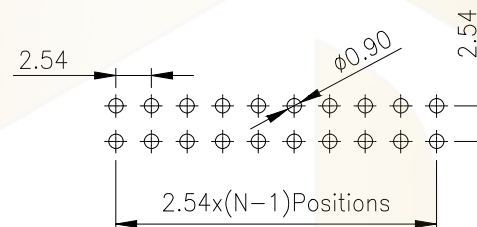


SPECIFICATIONS

Insulator:	Black glass filled polyester PPS-GF30-FR
Flammability:	UL 94V-0
Sleeve:	Brass
Contact clip(6 finger):	Beryllium copper(C17200)
Accepted pin:	Ø0.70 to 0.90mm,0.635mm
Forces:	(polished steel gauge Ø0.76mm)
--Insertion	2 N typ
--Withdrawal	1 N typ
Mechanical life:	min500 cycles
Rated current:	3A
Contact resistance:	max 10mΩ
Dielectric resistance:	Min 1000V RMS
Max.Processing Temp:	230°C for 30-60 seconds (260°C for 10 seconds)

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

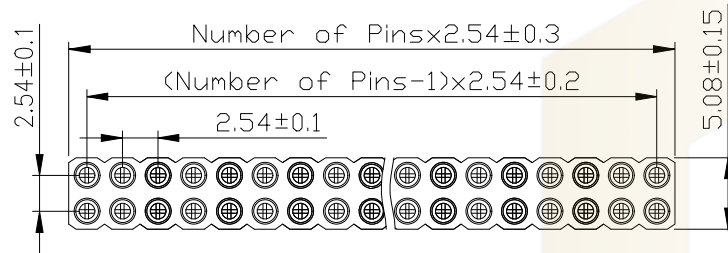

Ordering Information

PM 254	- *	- N	- Z	- *	- **	- C
No. of Rows 1=Single Row 2=Dual Row	No. of Pins 2=40Pin	Type 2=直针 40=直插	Length (产品长度)	Contact Plating G0:Gold Flash G1:1u" Gold G2:3u" Gold G3:5u" Gold G4:10u" Gold G5:15u" Gold G6:30u" Gold G8:Gold Flash/Tin S1:Tin	Round Pin (8881)	

			GENERAL TOLERANCE		制 图	深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO.,LTD			
			DIM	TOL	DRAWING				
			X. X	±0.30	审 核	产品名称	2.54 双排 排母 圆直针	版 本	A
			X. XX	±0.20	批 准	TITLE	塑高7.0 (L=10mm)	REV.	
			X. XXX	±0.10	APPROVAL	产品料号	PM254-2-N-Z-7.0-XX-C	单 位	mm
序号 No.	变更内容 MODIFY CONTENT	日期 MODIFY DATE	Angle	±3.0°	比 例 SCALE	PART NO.		UNIT SHEET	1/1
			投影 Projection			材料 MATERIAL			