



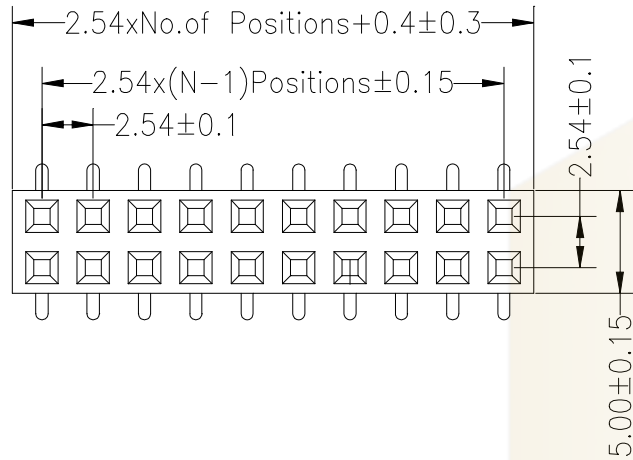



Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

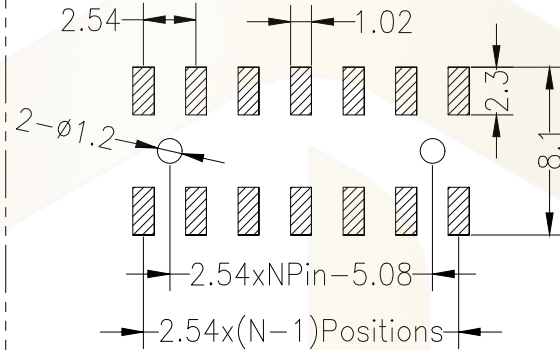


SPECIFICATIONS

Rated Current:3.0AMP
Contact Resistance:20mΩ Max
Withstand Voltage:1000V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:-40°c to +105°c

Contact Material:Brass
Contact Plating:Au or Sn Over Ni
Insulator Material:Polyester(UL94V-0)
Standard: PA6T
Max.Processing Temp: 230°C for 30-60 seconds
(260°C for 10 seconds)

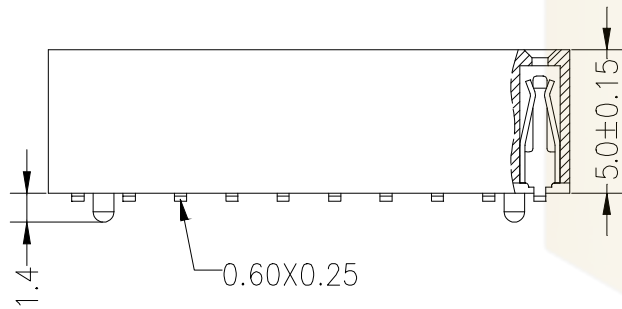

P = With Post



默认= W/O Post

Ordering Information

PM 254 - * - N - S - * - ** - P

No. of Rows
1=Single Row
2=Dual Row

No. of Pins
2-40Pin

Type
2-直插
9-弯插
S-立贴
W-带贴

Length
(塑料)

Contact
G0:Gold Flash
G1:1u" Gold
G2:3u" Gold
G3:5u" Gold
G4:10u" Gold
G5:15u" Gold
G6:30u" Gold
S0:Gold Flash/Tin
S1:Tin

Plating
(电镀)

GENERAL TOLERANCE			制图	深圳市华灿天禄电子有限公司			
			DRAWING	ShenzhenhuacantianluELECTRONICS CO.,LTD			
			审核	产品名称	2.54双排 排母 贴片 (塑高5.0)	版本	A
			CHECK	TITLE		REV.	
			批准	产品料号	PM254-2-N-S-5.0-XX(L5.3)	单位	mm
			APPROVAL	PART NO.		UNITS	
			比例	材料		页次	1/1
			SCALE	MATERIAL		SHEET	
			投影				
			Projection				
序号	变更内容	日期					
No.	MODIFY CONTENT	MODIFY DATE					