
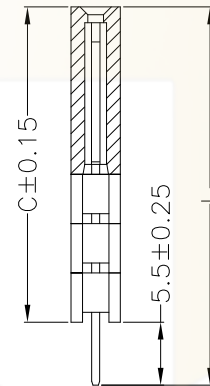
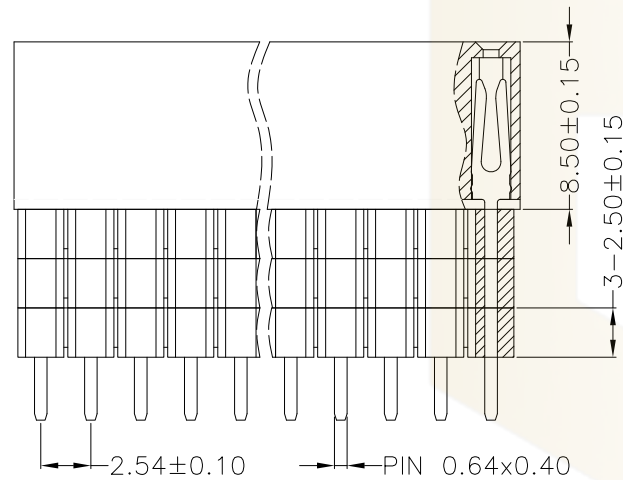
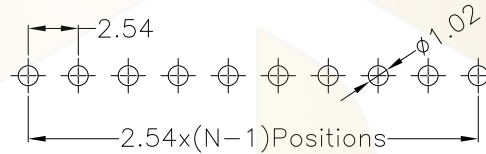


Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE ± 0.05)

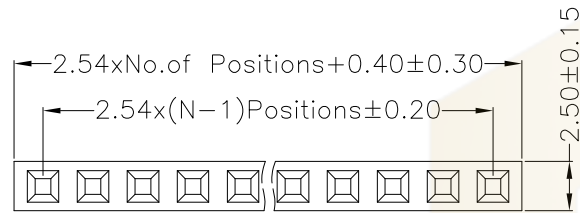

SPECIFICATIONS
Rated Current:3.0AMP
Contact Resistance:20m Ω Max
Withstand Voltage:1000V AC/DC
Insulation Resistance:1000M Ω Min
Operation Temperature:-40 $^{\circ}$ c to +105 $^{\circ}$ c

Contact Material:Copper Alloy
Contact Plating:Au or Sn Over Ni
Insulator Material:Polyester(UL94V-0)
Standard: PA6T
Max.Processing Temp: 260 $^{\circ}$ C $\pm 5^{\circ}$ C 5S

Ordering Information

PM 254 - * - N - Z - C* - ** - *LP

No.of Rows
1=Single Row
2=Dual Row
No.of Pins
02-40Pin
Type
=01F
=02F
=03F
Length
(Pitch)
Contact Plating
G0:Gold Flash
G1:10u" Gold
G2:30u" Gold
G3:50u" Gold
G4:100u" Gold
G5:150u" Gold
G6:300u" Gold
S0:Gold Flash/Tin
S1:Tin
1~5 Layer
Of Plastic
(金锡层厚度)

			GENERAL TOLERANCE		制图 DRAWING	深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO., LTD			
			DIM	TOL	审核 CHECK	产品名称 TITLE	2.54 单排 排母 直针 (加3层塑胶)	版本 REV.	A
			X.X	± 0.30	批准 APPROVAL	产品料号 PART NO.	PM254-1-N-Z-C16.0-XX-3LP(L21.5)	单位 UNITS	mm
			X.XX	± 0.20	比例 SCALE	材料 MATERIAL		页次 SHEET	1/1
			X.XXX	± 0.10	投影 Projection				
1	初版发行	日期 MODIFY DATE	Angle	$\pm 3.0^{\circ}$					
序号 No.	变更内容 MODIFY CONTENT								