
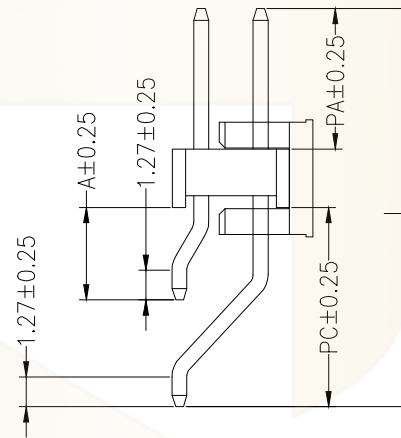
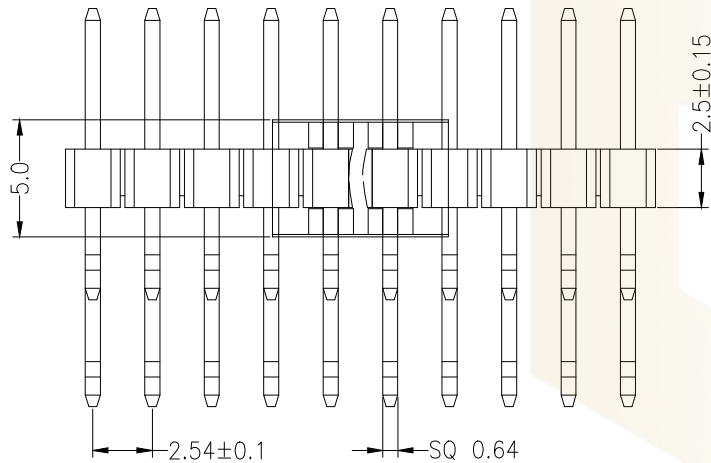
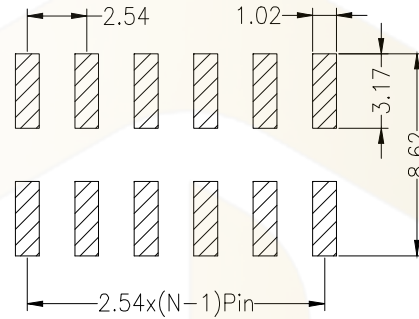


Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE ± 0.05)

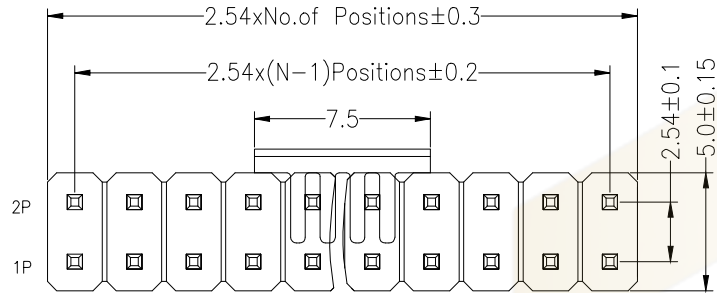

SPECIFICATIONS
Rated Current:3.0AMP
Contact Resistance:20m Ω Max
Withstand Voltage:1000V AC/DC
Insulation Resistance:1000M Ω Min
Operation Temperature:-40°C to +105°C

Contact Material:Brass
Contact Plating:Au Over Ni
Insulator Material:Polyester(UL94V-0)
Standard: PA6T
Max.Processing Temp: 230°C for 30-60 seconds
(260°C for 10 seconds)

Dimension antitheses list

ITEM	PA	A	PC	L
Standard	6.00	3.94	8.50	17.00
Alternate				

Ordering Information

PZ 254 - * - N - WS - * - **

No.of Rows 1=Single Row 2=Dual Row	No.of Pins 2-40Pin	Type 2=直插 8=弯插 S=贴片 WS=焊插	Length (产品长度)	Contact Plating G0:Gold Flash G1:1u" Gold G2:3u" Gold G3:5u" Gold G4:10u" Gold G5:15u" Gold G6:30u" Gold S0:Gold Flash/Tin S1:Tin
--	-----------------------	---------------------------------------	------------------	--

			GENERAL TOLERANCE		制 图 DRAWING		深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO.,LTD				
			DIM	TOL	审 核 CHECK						
			X.X	±0.30	批 准 APPROVAL		产品名称 TITLE		2.54 双排 卧贴 排针 (塑高2.5)	版 本 REV.	A
1	初版发行		X.XX	±0.20			产品料号 PART NO.		PZ254-2-N-WS-2.5-XX(L17.0)	单 位 UNITS	mm
			X.XXX	±0.10	比 例 SCALE						
序号 No.	变更内容 MODIFY CONTENT	日 期 MODIFY DATE	Angle	±3.0°	投 影 Projection		材 料 MATERIAL			页 次 SHEET	1/1