


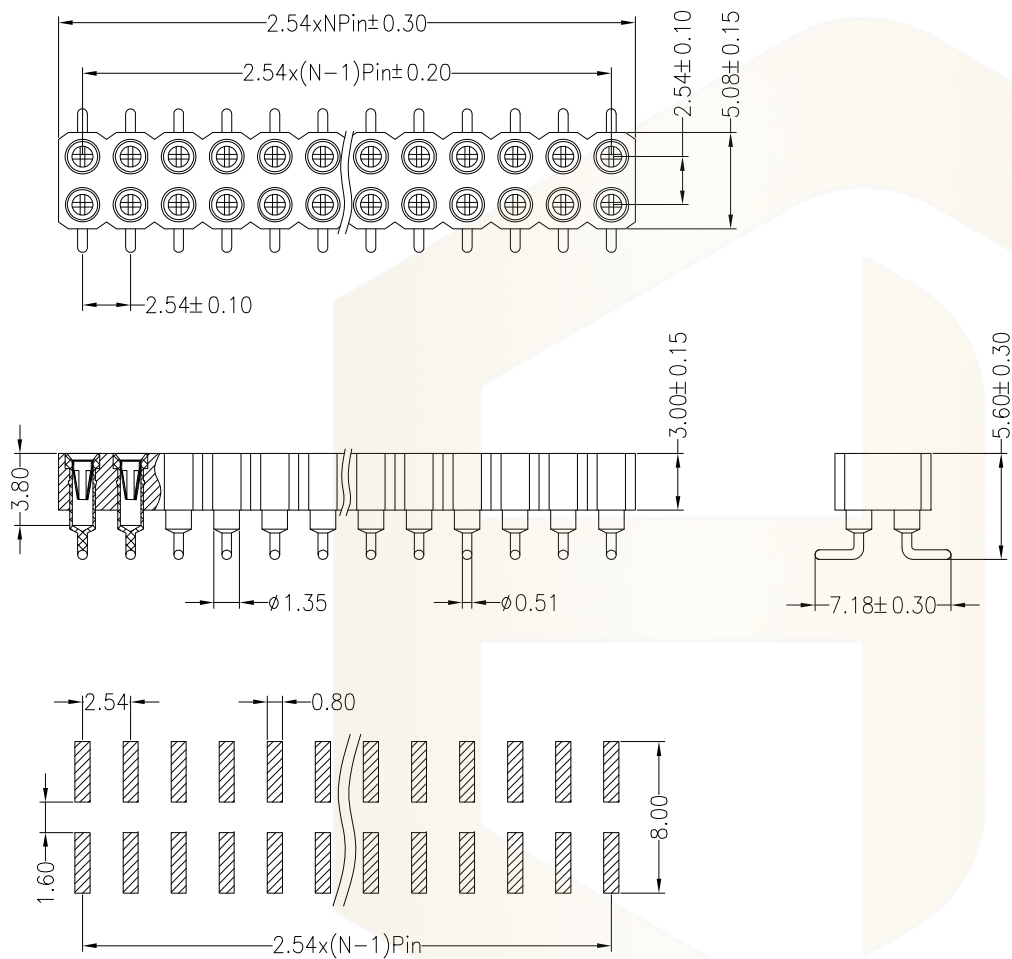

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE ± 0.05)

SPECIFICATIONS

Current Rating:3.0AMP
Contact Resistance:10m Ω Max
Dielectric Strength:Min 1000V RMS
Mating Pin: $\phi 0.4$ to $\phi 0.56$ mm
Forces:(polished steel gauge $\phi 0.43$ mm)
Operation Temperature:-40 $^{\circ}$ c to +105 $^{\circ}$ c

Sleeve:Brass
Contact Plating:Au Over Ni
Contact Clip(4 finger):Phosphor Bronze/BeCu
Insulator Material:Polyester(UL94V-0)
Standard: PPS
Soldering Temperature: 260 $^{\circ}$ C $\pm 5^{\circ}$ 5S

Ordering Information

PM 254 - * - N - Z - * - ** - C					
No. of Rows 1=Single Row 2=Dual Row	No. of Pins 2=40Pin	Type (=40Pin) (=40Pin) (=40Pin)	Length (1/2英寸)	Contact G0:Gold G1:1u" Gold G2:3u" Gold G3:5u" Gold G4:10u" Gold G5:15u" Gold G6:30u" Gold S0:Gold Flash/Tin S1:Tin	Plating Flash Gold Gold Gold Gold Gold Gold Gold/Tin
					Ros Pin (0.041)

GENERAL TOLERANCE			制图		深圳市华灿天禄电子有限公司			
DIM TOL			审核		ShenzhenhuacantianluELECTRONICS CO., LTD			
X. X ± 0.30			批准		产品名称	2.54 双排 排母 立贴圆针	版本	A
X. XX ± 0.20			比例		TITLE	塑高3.0 (L=5.6mm)	REV.	
X. XXX ± 0.10			投影		产品料号	PM254-2-N-S-3.0-XX-C	单位	mm
Angle $\pm 3.0^{\circ}$			材料		PART NO.		页次	1/1
序号	变更内容	日期	投影		MATERIAL		SHEET	
No.	MODIFY CONTENT	MODIFY DATE	Projection					