

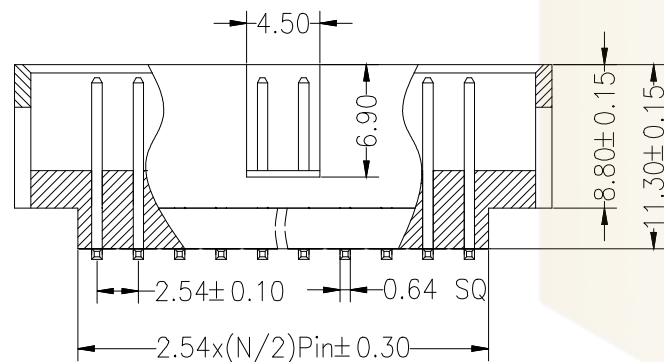
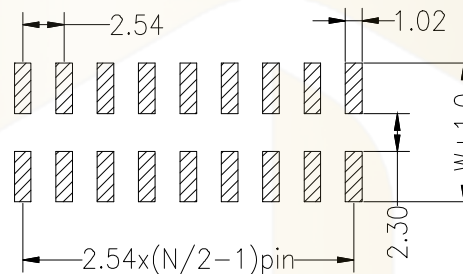


Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

SPECIFICATIONS

Rated Current:3.0AMP
Contact Resistance:20mΩMax
Withstand Voltage:1000V AC/DC
Insulation Resistance:1000MΩMin
Operation Temperature:-40°C to +105°C

Contact Material:Brass
Contact Plating:Au or Sn Over Ni
Insulator Material:Polyester(UL94V-0)
Resistance To Soldering Heat:
260°C±5°C, 10s(PA6T&PA9T&LCP insulator)

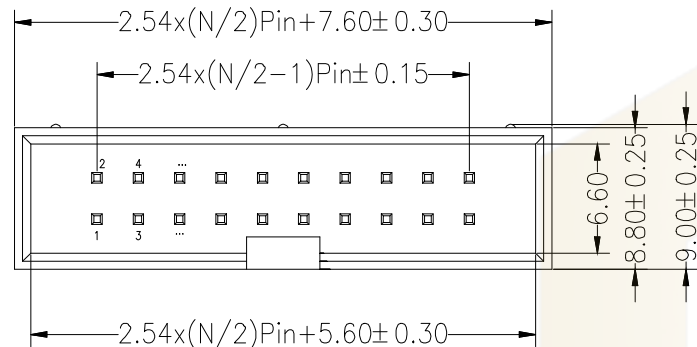

Ordering Information

HC-JN 254 - * - N - S - * - **

No. of Rows
1=Single Row
2=Dual Row
No. of Pins
06-64Pin
Type
2=塑料
4=陶瓷
5=贴片
Length
(mm)
Contact Plating
G0:Gold Flash
G1:1u" Gold
G2:3u" Gold
G3:5u" Gold
G4:10u" Gold
G5:15u" Gold
G6:30u" Gold
S0:Gold Flash/Tin
S1:Tin

			GENERAL TOLERANCE		制 图 DRAWING		 深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO.,LTD				
			DIM	TOL	审 核 CHECK						
			X.X	±0.30	批 准 APPROVAL		产品名称 TITLE	筒牛2.54 加高 双排 贴片	版 本 REV.	A	
			X.XX	±0.20	比 例 SCALE		产品料号 PART NO.	HC-JN254-2-N-S-11.3-XX	单 位 UNITS	mm	
1	初版发行		X.XXX	±0.10	投 影 Projection			材 料 MATERIAL		页 次 SHEET	1/1
序号 No.	变更内容 MODIFY CONTENT	日期 MODIFY DATE	Angle	±3.0°							