

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE ± 0.05)

SPECIFICATIONS

Rated Current:3.0AMP

Contact Resistance:20m Ω Max

Withstand Voltage:1000V AC/DC

Insulation Resistance:1000M Ω Min

Operation Temperature:-40°C to +105°C





Contact Material:Brass

Contact Plating:Au or Sn Over Ni


Insulator Material:Polyester(UL94V-0)

Standard: PA6T


Max.Processing Temp: 230°C for 30-60 seconds
(260°C for 5 seconds)

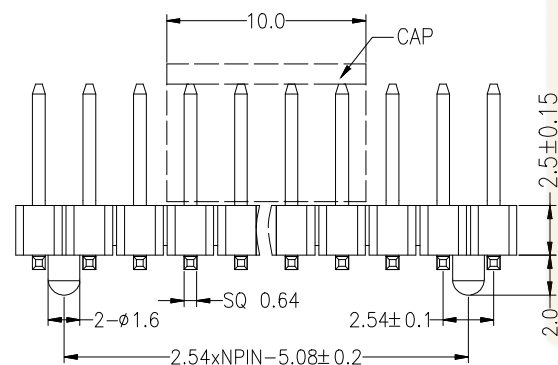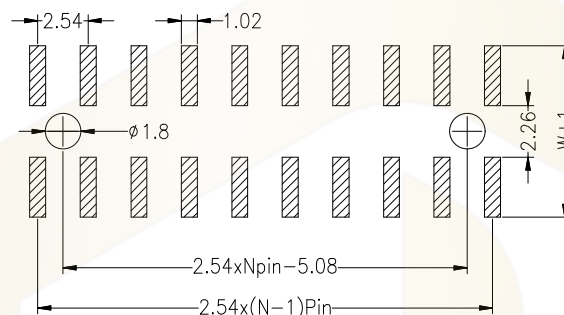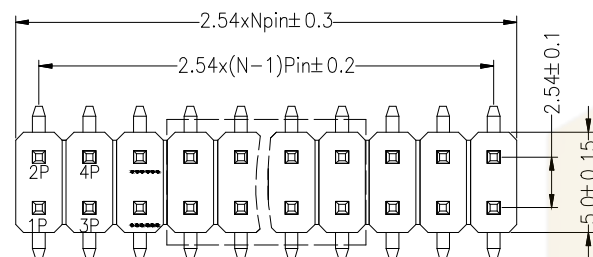

P=With Post



默认=W/O Post



Dimension antitheses list

ITEM	PA	PB	W	L
Standard	6.00	3.20	7.50	9.20

Ordering Information

PZ	254	-	*	-	N	-	*	-	*	-	**	-	*	-	P
No. of Rows	1=Single Row	No. of Pins	2=40Pin	Type	2=直针 3=弯针 4=带钩	Length	(mm)	Contact	G0:Gold	Plating	Flash	Packing	R=Reel	Post	(mm)
								G1:1u" Gold					+Cap		
								G2:3u" Gold							
								G3:5u" Gold							
								G4:10u" Gold							
								G5:15u" Gold							
								G6:30u" Gold							
								S0:Gold							
								S1:Tin							

GENERAL TOLERANCE			制 图		深圳市华灿天禄电子有限公司			
DIM			审 核		ShenzhenhuacantianluELECTRONICS CO.,LTD			
X. X			批 准		产品名称	2.54 双排 排针 贴片	版本	A
X. XX			APPROVAL		TITLE	编带+盖 (塑高2.5)	REV.	
X. XXX			比 例		产品料号	PZ254-2-N-S-2.5-XX-R (L9.2)	单 位	mm
Angle			投 影		PART NO.		页 次	1/1
序号	变更内容	日期	材料		MATERIAL		SHEET	
No.	MODIFY CONTENT	MODIFY DATE						