
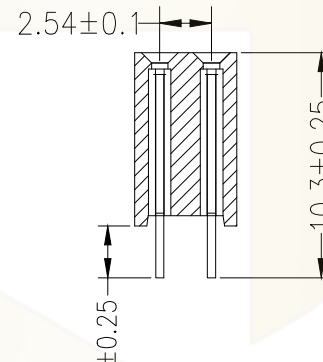
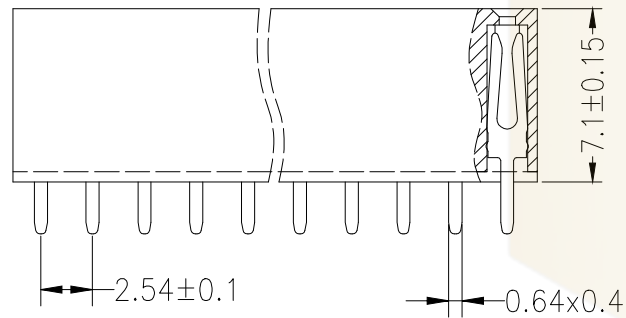
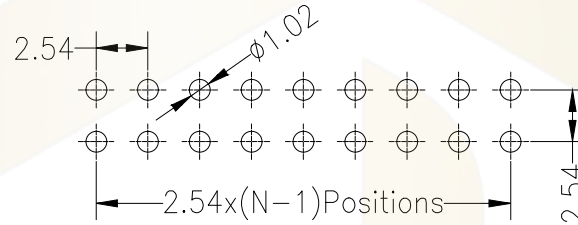


Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE ± 0.05)

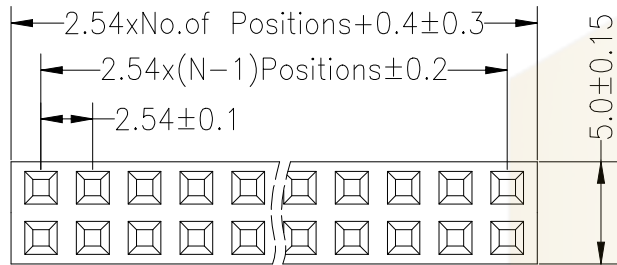

SPECIFICATIONS

Rated Current:3.0AMP

Contact Resistance:20m Ω Max

Withstand Voltage:1000V AC/DC

Insulation Resistance:1000M Ω Min

Operation Temperature:-40°C to +105°C

Contact Material:Copper Alloy

Contact Plating:Au or Sn Over Ni

Insulator Material:Polyester(UL94V-0)

Standard: PA6T

Max.Processing Temp: 260°C $\pm 5^{\circ}\text{C}$ 5S

Ordering Information

PM 254 - * - N - Z - * - **

No.of Rows 1=Single Row 2=Dual Row	No.of Pins 2-40Pin	Type Z=直针 R=弯针 S=插针 W=插针	Length (Pitch)	Contact Plating G0:Gold Flash G1:1u" Gold G2:3u" Gold G3:5u" Gold G4:10u" Gold G5:15u" Gold G6:30u" Gold S0:Gold Flash/Tin S1:Tin
--	-----------------------	--------------------------------------	-------------------	--

GENERAL TOLERANCE			制图 DRAWING	深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO.,LTD		
DIM	TOL	审核 CHECK	批准 APPROVAL	产品名称 TITLE	2.54双排 排母 直针(塑高7.1)	版本 REV.
X.X	± 0.30			产品料号 PART NO.	PM254-2-N-Z-7.1-XX(L10.3)	单位 UNITS
X.XX	± 0.20			材料 MATERIAL		页次 SHEET
X.XXX	± 0.10					1/1
Angle	$\pm 3.0^{\circ}$					
序号 No.	变更内容 MODIFY CONTENT	日期 MODIFY DATE	投影 Projection			