

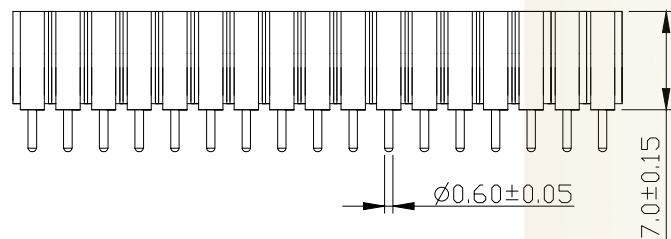
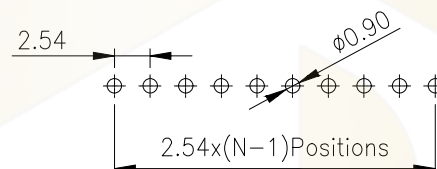


Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

SPECIFICATIONS

Insulator: Black glass filled polyester PPS-GF30-FR
Flammability: UL 94V-0
Sleeve: Brass
Contact clip(6 finger): Beryllium copper(C17200)
Accepted pin: Ø0.70 to 0.90mm,0.635mm
Forces: (polished steel gauge Ø0.76mm)
--Insertion 2 N typ
--Withdrawal 1 N typ
Mechanical life: min500 cycles
Rated current: 3A
Contact resistance: max 10mΩ
Dielectric resistance: Min 1000V RMS
Max.Processing Temp: 230°C for 30-60 seconds
(260°C for 10 seconds)

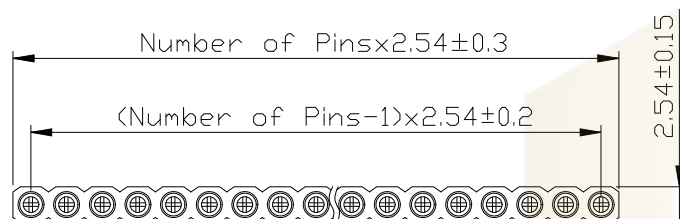

Ordering Information

PM 254 - * - N - Z - * - ** - C

No. of Rows
1=Single Row
2=Dual Row

No. of Pins
2-40Pin

Type
2-直针
3-弯针
4-插板

Length
(产品长度)

Contact Plating
G0:Gold Flash
G1:1u" Gold
G2:3u" Gold
G3:5u" Gold
G4:10u" Gold
G5:15u" Gold
G6:30u" Gold
G8:Gold Flash/Tin
S1:Tin

Round Pin
(8881)

			GENERAL TOLERANCE		制图	深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO.,LTD			
			DIM	TOL	审核				
			X. X	±0.30	批准	产品名称	2.54 单排 排母 圆直针	版本	A
			X. XX	±0.20	APPROVAL	TITLE	塑高7.0 (L=10mm)	REV.	
			X. XXX	±0.10	比例	产品料号	PM254-1-N-Z-7.0-XX-C	单位	mm
			Angle	±3.0°	SCALE	PART NO.		UNITS	
序号	变更内容	日期	投影		投影	材料		页次	1/1
No.	MODIFY CONTENT	MODIFY DATE				MATERIAL		SHEET	