
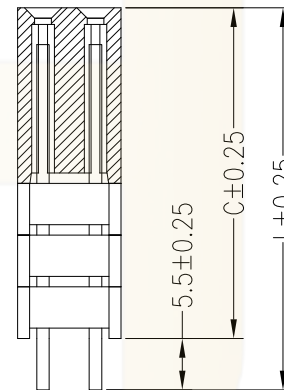
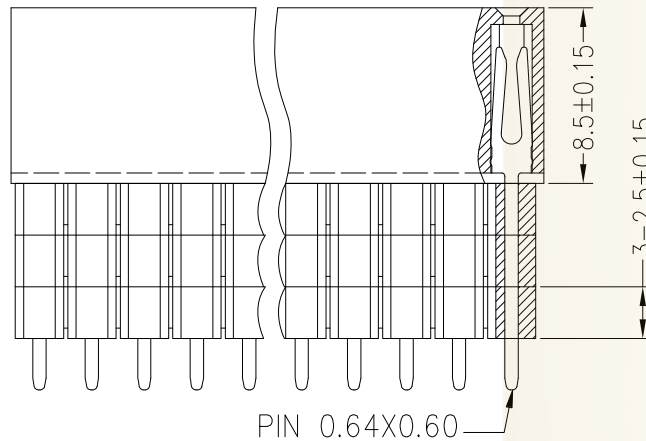
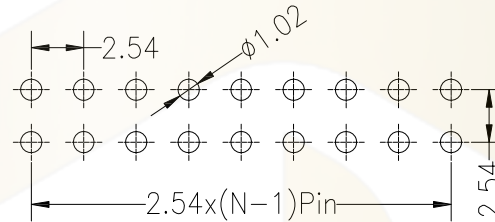


Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

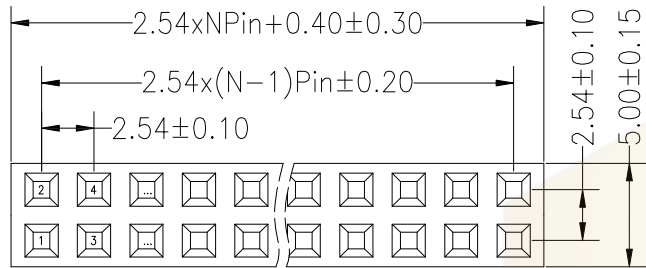

SPECIFICATIONS

Rated Current:3.0AMP

Contact Resistance:20mΩ Max

Withstand Voltage:1000V AC/DC

Insulation Resistance:1000MΩ Min

Operation Temperature:-40°C to +105°C

Contact Material:Copper Alloy

Contact Plating:Au or Sn Over Ni

Insulator Material:Polyester(UL94V-0)

Max.Processing Temp:

(PBT)245°C±5°C For 5~10 Second

(PA6T/LCP/PA9T)260°C±5°C For 5~10 Second

Ordering Information

PM 254	- *	- N	- Z	- C*	- **	- *LP
No. of Rows 1=Single Row 2=Dual Row	No. of Pins 02-40Pin	Type <=11 >11 (S=0.8) (V=0.8)	Length (mm)	Contact G0:Gold Flash G1:1u" Gold G2:3u" Gold G3:5u" Gold G4:10u" Gold G5:15u" Gold G6:30u" Gold S0:Gold Flash/Tin S1:Tin	Plating	1~5 Layer Of Plastic (叠加层塑胶)

			GENERAL TOLERANCE		制 图 DRAWING		 深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO., LTD					
			DIM TOL		审 核 CHECK							
			X.X ±0.30		批 准 APPROVAL		产 品 名 称 TITLE		2.54双排 直排母(加3层塑胶)		版 本 REV.	A
			X.XX ±0.20		X.XXX ±0.10		比 例 SCALE		产 品 料 号 PART NO.		PM254-2-N-Z-C16.0-XX-3LP(L21.5)	
1	初版发行		Angle ±3.0°		投 影 Projection				材 料 MATERIAL			
序号 No.	变更内容 MODIFY CONTENT		日期 MODIFY DATE						页 次 SHEET		1/1	