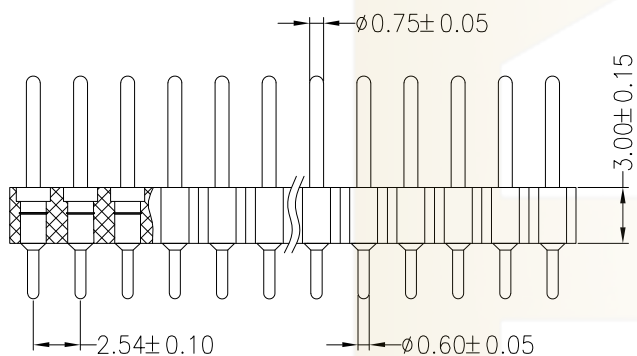
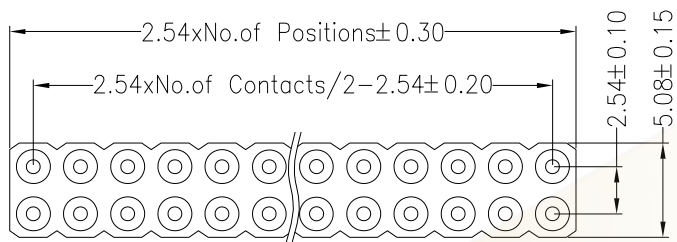


Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

SPECIFICATIONS

Current Rating:3.0AMP
Contact Resistance:10mΩ Max
Dielectric Strength:Min 1000V RMS
Operation Temperature:-40°c to +105°c

Contact Material:Brass
Contact Plating:Au Over Ni
Insulator Material:Polyester(UL94V-0)
Resistance To Soldering Heat:
260° C±5° C, 10s(PPS insulator)

Ordering Information

No.of Rows	No.of Pins	Type	Length	Contact Plating	Round Pin	Product Code
1=Single Row	01-40Pin	2=H (直插) 3=H (贴片)	(产品规格)	G0:Gold Flash G1:1u" Gold G2:3u" Gold G3:5u" Gold G4:10u" Gold G5:15u" Gold G6:30u" Gold S0:Gold Flash/Tin S1:Tin	A=11.96mm B=11.1mm C=12.01mm	

工程专用章			GENERAL TOLERANCE		制 图 DRAWING		深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO.,LTD							
			DIM TOL		审 核 CHECK									
			X.X ±0.30		批 准 APPROVAL		产品名称 TITLE		2.54双排 双头 圆直排针 L12.01 塑高3.0(上针0.75 下针0.6)		版 本 REV.	A		
1 初版发行			X.XX ±0.20		比 例 SCALE		产品料号 PART NO.		PZ254-2-N-Z-3.0-XX-CC		单 位 UNITS	mm		
序号 No.			变更内容 MODIFY CONTENT		日 期 MODIFY DATE		Angle ±3.0°		投 影 Projection			材 料 MATERIAL	页 次 SHEET	1/1