
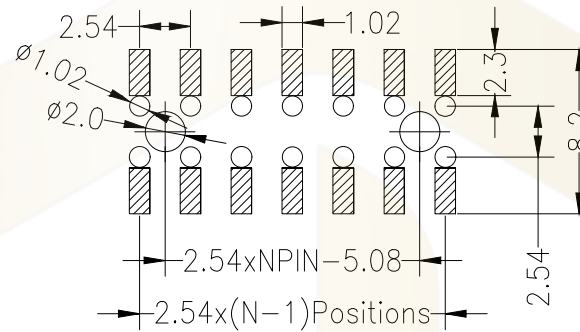





Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

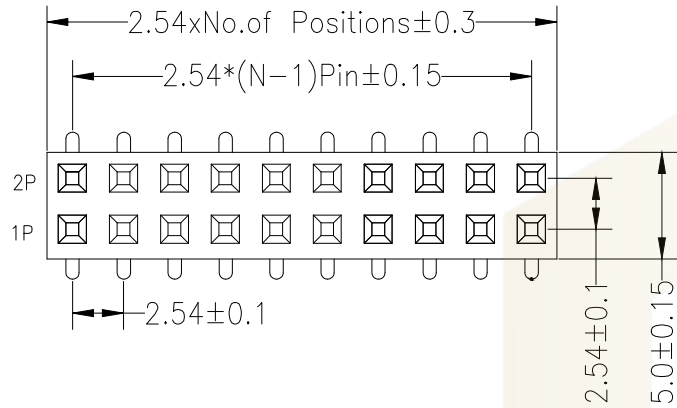

SPECIFICATIONS

Rated Current:3.0AMP
Contact Resistance:20mΩ Max
Withstand Voltage:1000V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:-40°c to +105°c

Contact Material:Brass
Contact Plating:Au or Sn Over Ni
Insulator Material:Polyester(UL94V-0)
Standard: PA6T
Max.Processing Temp: 230°C for 30-60 seconds
(260°C for 10 seconds)

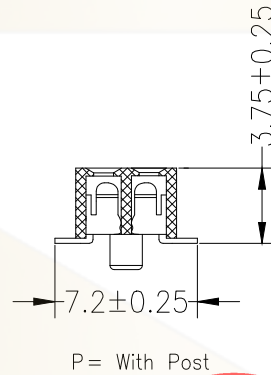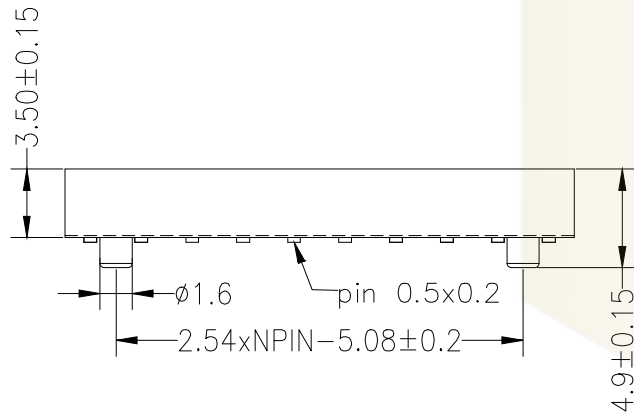

Ordering Information

PM 254 - * - N - S - * - ** - P

No. of Rows
1=Single Row
2=Dual Row

No. of Pins
2-40Pin

Type
Z=直针
S=弯针
W=带焊脚

Length
(Plastic)
(塑封)

Contact Plating
G0:Gold Flash
G1:1u" Gold
G2:3u" Gold
G3:5u" Gold
G4:10u" Gold
G5:15u" Gold
G6:30u" Gold
S0:Gold Flash/Tin
S1:Tin

工程专用章			GENERAL TOLERANCE		制 图 DRAWING		深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO.,LTD					
			DIM	TOL	审 核 CHECK							
			X.X	±0.30	批 准 APPROVAL		产品名称 TITLE		2.54双排 排母 贴片(塑高3.5)	版 本 REV.	A	
			X.XX	±0.20	比 例 SCALE		产品料号 PART NO.		PM254-2-N-S-3.5-XX(L3.75)	单位 UNITS	mm	
			X.XXX	±0.10								
1	初版发行		Angle	±3.0°	投 影 Projection				材 料 MATERIAL		页 次 SHEET	1/1
序号 No.	变更内容 MODIFY CONTENT		日期 MODIFY DATE									