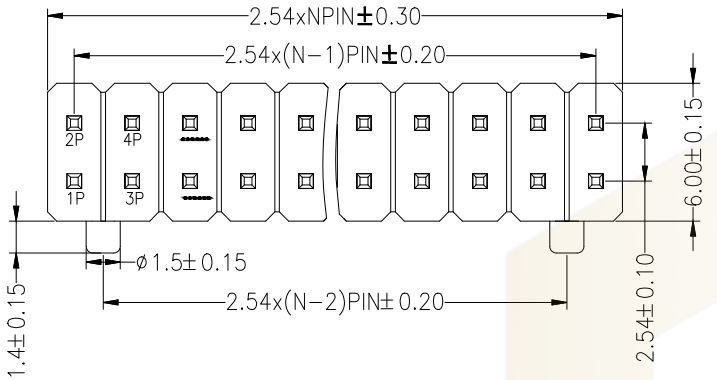

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

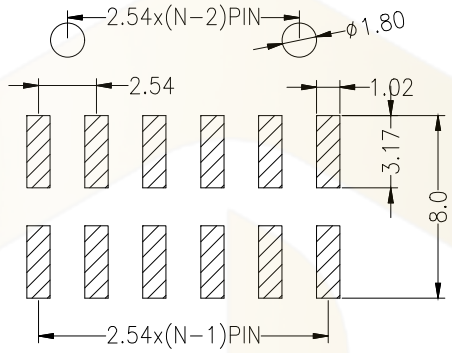

SPECIFICATIONS
Rated Current:3.0AMP
Contact Resistance:20mΩ Max
Withstand Voltage:1000V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:-40°c to +105°c

Contact Material:Brass
Contact Plating:Au or Sn Over Ni
Insulator Material:Polyester(UL94V-0)
Standard: PA6T
Max.Processing Temp: 260°C±5°C 5S

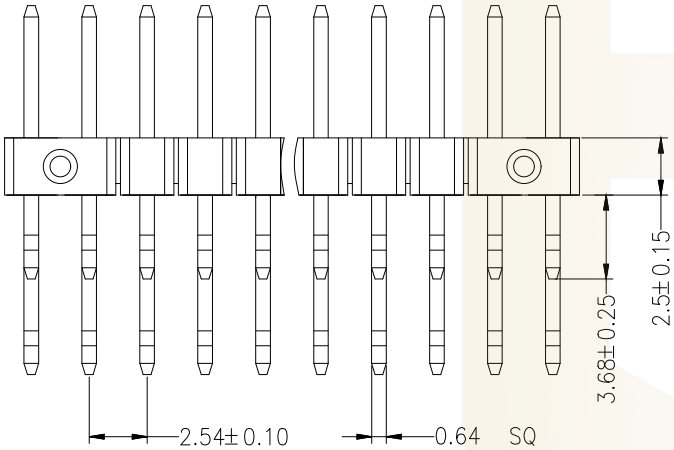

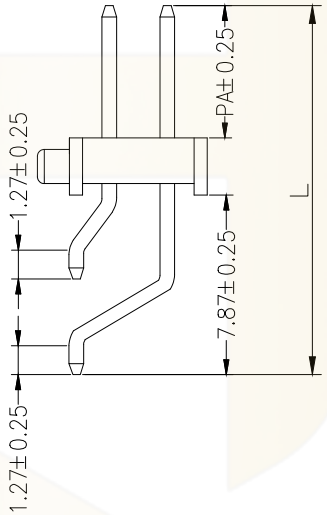

Dimension antitheses list		
ITEM	PA	L
Standard	5.80	16.17
Alternate		

Ordering Information

PZ 254 - * - N - WS - * - ** - SP

- No.of Rows: 1=Single Row, 2=Dual Row
- No.of Pins: 2-40Pin
- Type: 2-直针, R-弯针, S-立贴, WS-卧贴
- Length (产品塑高)
- Contact Plating Flash: G0:Gold Flash, G1:1u" Gold, G2:3u" Gold, G3:5u" Gold, G4:10u" Gold, G5:15u" Gold, G6:30u" Gold, S0:Gold Flash/Tin, S1:Tin
- Side post (带侧边柱)

深圳市华灿天禄电子有限公司 工程专用章

序号 No.	变更内容 MODIFY CONTENT	日期 MODIFY DATE
1	初版发行	

GENERL TOLERANCE		制图 DRAWING	
DIM	TOL	审核 CHECK	
X.X	±0.30	批准 APPROVAL	
X.XX	±0.20	比例 SCALE	
X.XXX	±0.10	投影 Projection	
Angle	±3.0°		

深圳市华灿天禄电子有限公司
ShenzhenhuacantianluELECTRONICS CO.,LTD

产品名称 TITLE	2.54双排 卧贴排针 带侧柱 (塑高2.5)	版本 REV.	A
产品料号 PART NO.	PZ254-2-N-WS-2.5-XX-SP(L16.17)	单位 UNITS	mm
材料 MATERIAL		页次 SHEET	1/1