


Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

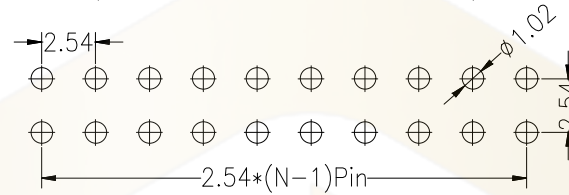

SPECIFICATIONS

Rated Current:3.0AMP

Contact Resistance:20mΩ Max

Withstand Voltage:1000V AC/DC

Insulation Resistance:1000MΩ Min

Operation Temperature:-40°C to +105°C

Contact Material:Copper Alloy



Contact Plating:Au or Sn Over Ni

Insulator Material:Polyester(UL94V-0)

Max.Processing Temp:

(PBT)245°C±5°C For 5~10 Second

(PA6T/LCP/PA9T)260°C±5°C For 5~10 Second

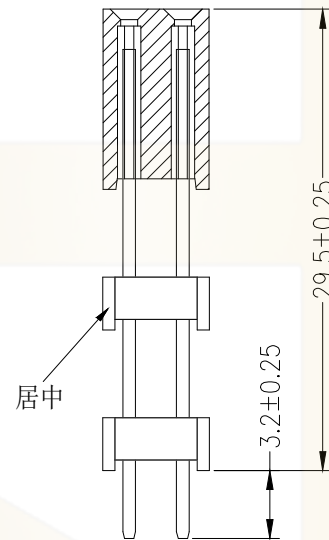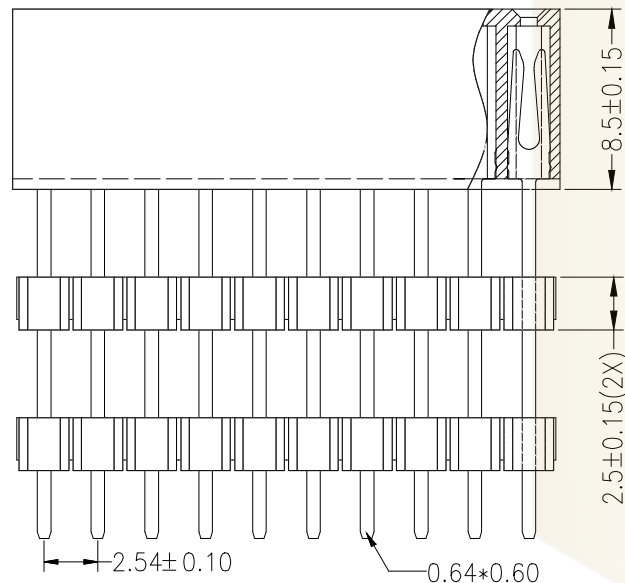

Ordering Information

PM 254 - * - N - Z - C* - ** - 2LP

No.of Rows
1=Single Row
2=Dual Row

No.of Pins
02-40Pin

Type
Z=直排
N=斜排
S=弯排
W=弯排

Length
(Plastic)
(塑胶)

Contact Plating
G0:Gold Flash
G1:1u" Gold
G2:3u" Gold
G3:5u" Gold
G4:10u" Gold
G5:15u" Gold
G6:30u" Gold
S0:Gold Flash/Tin
S1:Tin

2 Layer Of Plastic
(加2层塑胶)



GENERAL TOLERANCE			制图 DRAWING		深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO.,LTD			
DIM		TOL	审核 CHECK		产品名称 TITLE	2.54双排 直排母(加2层塑胶)	版本 REV.	A
X.X		±0.30	批准 APPROVAL		产品料号 PART NO.	PM254-2-N-Z-C29.5-XX-2LP	单位 UNITS	mm
X.XX		±0.20	比例 SCALE		材料 MATERIAL		页次 SHEET	1/1
X.XXX		±0.10	投影 Projection					
Angle		±3.0°						
序号 No.	变更内容 MODIFY CONTENT	日期 MODIFY DATE						