

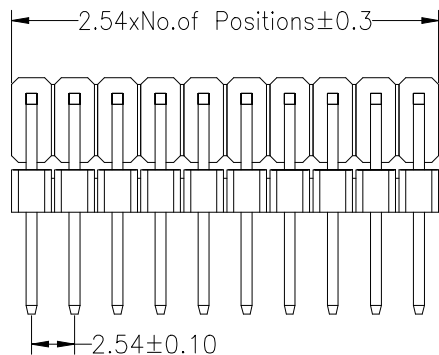
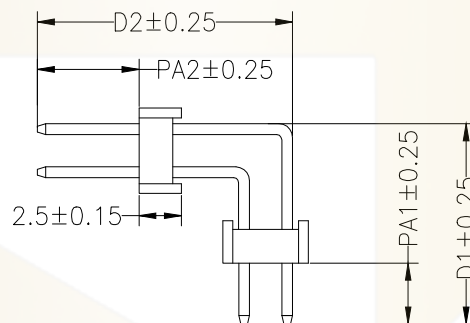


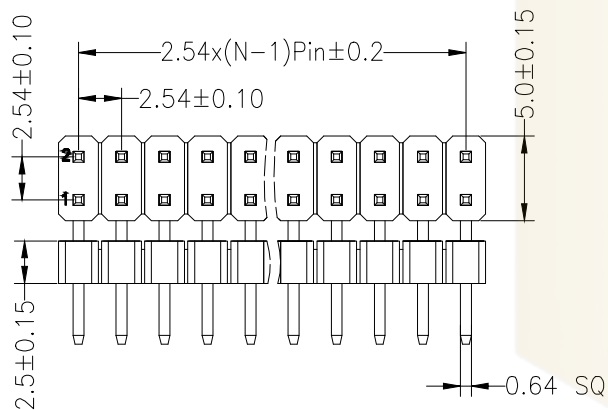

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

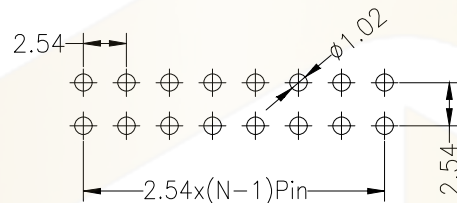

SPECIFICATIONS

Rated Current:3.0AMP
Contact Resistance:20mΩ Max
Withstand Voltage:1000V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:-40°c to +105°c

Contact Material:Brass
Contact Plating:Au Over Ni
Insulator Material:Polyester(UL94V-0)
Standard: PA6T
Max.Processing Temp: 230°C for 30-60 seconds
(260°C for 10 seconds)

Dimension antitheses list

ITEM	PA1	PA2	D1	D2
Standard				
Alternate	5.00	5.00	12.58	17.47

Ordering Information

PZ 254 - * - N - * - * - ** - DP												
No. of Rows 1=Single Row 2=Dual Row			No. of Pins 2-40Pin		Type 2=直针 8=弯针 S=双插 W=带插	Length (mm)		Contact G0:Gold G1:1u" Gold G2:3u" Gold G3:5u" Gold G4:10u" Gold G5:15u" Gold G6:30u" Gold S0:Gold S1:Tin	Plating Flash Gold Gold Gold Gold Gold Flash/Tin		Dual Plastic (双塑)	

			GENERAL TOLERANCE		制图 DRAWING				
			DIM	TOL	审核 CHECK				
			X.X	±0.30	批准 APPROVAL	产品名称 TITLE	2.54 双排 双塑 弯排针	版本 REV.	A
			X.XX	±0.20	比例 SCALE	产品料号 PART NO.	PZ254-2-N-W-2.5-XX-DP(D12.58)	单位 UNITS	mm
			X.XXX	±0.10	投影 Projection	材料 MATERIAL		页次 SHEET	1/1
序号 No.	变更内容 MODIFY CONTENT	日期 MODIFY DATE	Angle	±3.0°					