


Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

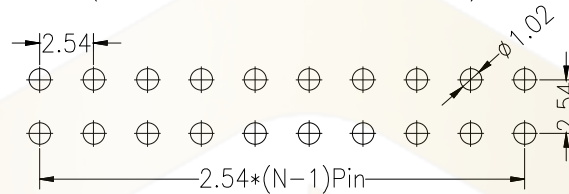

SPECIFICATIONS

Rated Current:3.0AMP

Contact Resistance:20mΩ Max

Withstand Voltage:1000V AC/DC

Insulation Resistance:1000MΩ Min

Operation Temperature:-40°C to +105°C

Contact Material:Copper Alloy



Contact Plating:Au or Sn Over Ni

Insulator Material:Polyester(UL94V-0)

Max.Processing Temp:

(PBT)245°C±5°C For 5~10 Second

(PA6T/LCP/PA9T)260°C±5°C For 5~10 Second

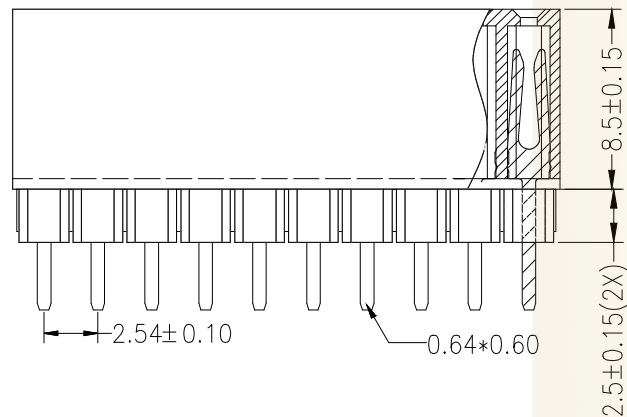

Ordering Information

No. of Rows 1=Single Row 2=Dual Row	No. of Pins 02-40Pin	Type Z=直排 H=弯排 S=空插 W=弯插	Length (Plastic)	Contact Plating G0:Gold Flash G1:1u" Gold G2:3u" Gold G3:5u" Gold G4:10u" Gold G5:15u" Gold G6:30u" Gold S0:Gold Flash/Tin S1:Tin	1 Layer Of Plastic (加1层塑胶)
PM 254	- *	- N	- Z	- C*	- **
					- 1LP

GENERAL TOLERANCE			制图	深圳市华灿天禄电子有限公司			
			DRAWING	ShenzhenhuacantianluELECTRONICS CO., LTD			
			审核	产品名称	2.54双排 直排母(加1层塑胶)	版本	A
			CHECK	TITLE		REV.	
			批准	产品料号	PM254-2-N-Z-C11.0-XX-1LP	单位	mm
			APPROVAL	PART NO.		UNITS	
			比例	材料		页次	1/1
			SCALE			SHEET	
			投影				
			Projection				
序号	变更内容	日期					
No.	MODIFY CONTENT	MODIFY DATE					