
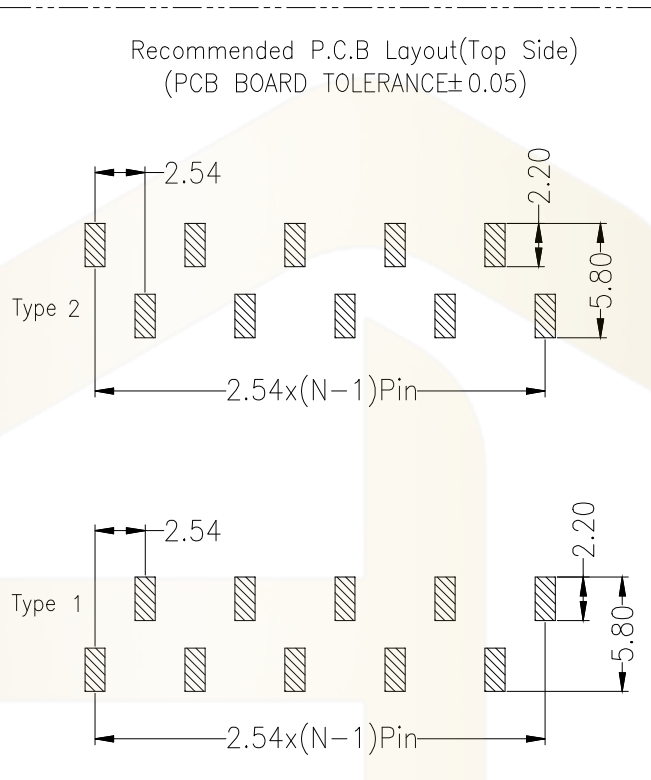
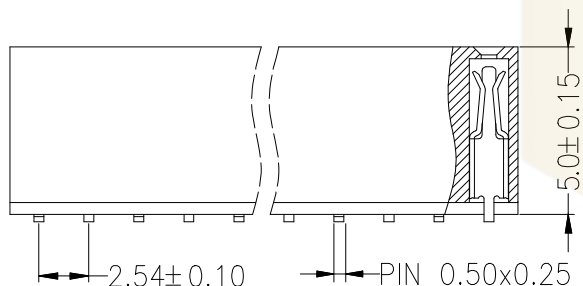
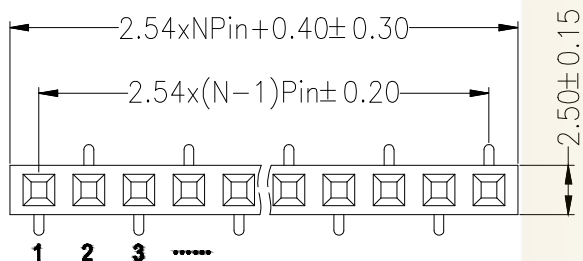


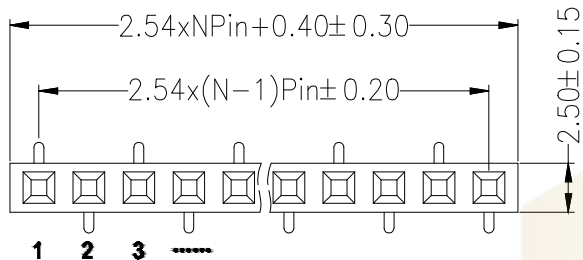

SPECIFICATIONS

Rated Current:3.0AMP

Contact Resistance:20mΩ Max

Withstand Voltage:1000V AC/DC

Insulation Resistance:1000MΩ Min

Operation Temperature:-40°C to +105°C

Contact Material:Copper Alloy

Contact Plating:Au Over Ni

Insulator Material:Polyester(UL94V-0)

Resistance To Soldering Heat:

260°C±5°C, 10s (PA6T)

Ordering Information

No. of Rows	No. of Pins	Type	Length	Contact	Plating	1=TYPE 1
1=Single Row	2=40Pin	2=40Pin	(产品长度)	G0:Gold Flash	G1:1u" Gold	2=TYPE 2
2=Dual Row				G2:3u" Gold	G3:5u" Gold	
				G4:10u" Gold	G5:15u" Gold	
				G6:30u" Gold	S0:Gold Flash/Tin	
				S1:Tin		

			GENERAL TOLERANCE		制 图 DRAWING	深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO.,LTD			
			DIM	TOL	审 核 CHECK				
			X. X	± 0.30	批 准 APPROVAL	产品名称 TITLE	2.54单排 排母 贴片(塑高5.0)	版 本 REV.	A
1	初版发行		X. XX	± 0.20	比 例 SCALE	产品料号 PART NO.	PM254-1-N-S-5.0-XX-X(L5.4)	单 位 UNITS	mm
			X. XXX	± 0.10					
序号 No.	变更内容 MODIFY CONTENT	日 期 MODIFY DATE	Angle	± 3.0°	投 影 Projection		材 料 MATERIAL	页 次 SHEET	1/1