
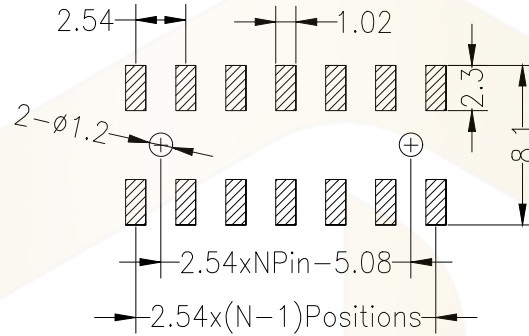





Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE ± 0.05)

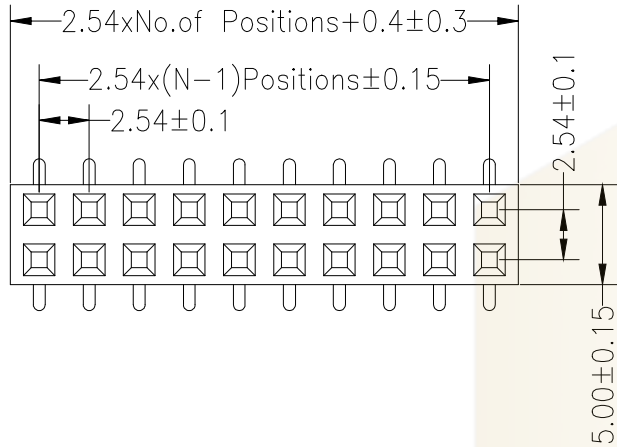

SPECIFICATIONS

Rated Current:3.0AMP
Contact Resistance:20m Ω Max
Withstand Voltage:1000V AC/DC
Insulation Resistance:1000M Ω Min
Operation Temperature:-40 $^{\circ}$ c to +105 $^{\circ}$ c

Contact Material:Brass
Contact Plating:Au or Sn Over Ni
Insulator Material:Polyester(UL94V-0)
Standard: PA6T
Max.Processing Temp: 230 $^{\circ}$ C for 30-60 seconds
(260 $^{\circ}$ C for 10 seconds)

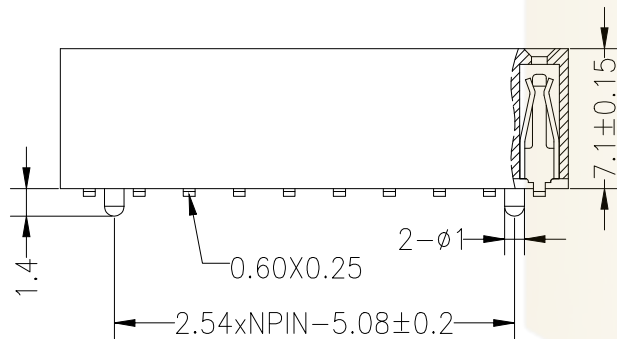

默认 = W/O Post

Ordering Information

PM 254 - * - N - S - * - ** - P

No. of Rows
1=Single Row
2=Dual Row

No. of Pins
2=40Pin

Type
2=直插
3=贴片
4=插针

Length (Metric)
(mm)

Contact Plating
G0:Gold Flash
G1:1u" Gold
G2:3u" Gold
G3:5u" Gold
G4:10u" Gold
G5:15u" Gold
G6:30u" Gold
S0:Gold Flash/Tin
S1:Tin

Post
(带柱)

工程专用章			GENERAL TOLERANCE		制 图 DRAWING		深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO.,LTD							
			DIM TOL		审 核 CHECK		产品名称 TITLE		2.54双排 排母 贴片 (塑高7.1)		版 本 REV.		A	
			X.X ±0.30		批 准 APPROVAL									
			X.XX ±0.20		比 例 SCALE		产品料号 PART NO.		PM254-2-N-S-7.1-XX (L7.5)		单 位 UNITS		mm	
			X.XXX ±0.10		投 影 Projection									
1 初版发行		Angle ±3.0°				材 料 MATERIAL		页 次 SHEET		1/1				
序号 No.		变更内容 MODIFY CONTENT		日 期 MODIFY DATE										