


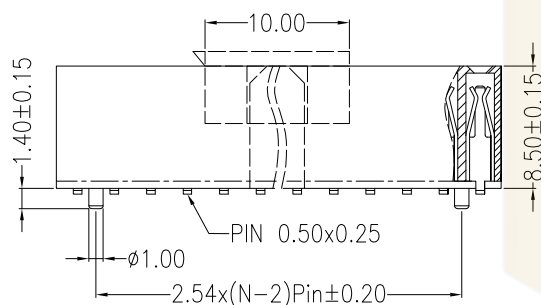
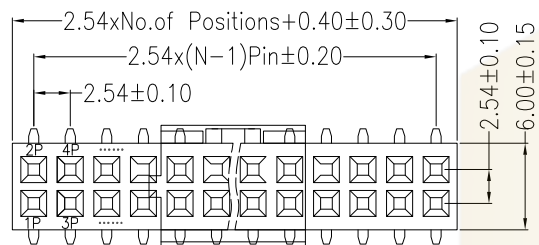




Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

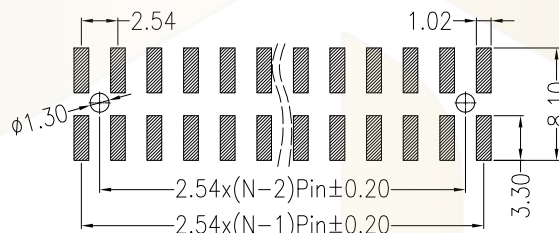

w=with Post



N=w/o post

SPECIFICATIONS

Rated Current:3.0AMP

Contact Resistance:20mΩ Max

Withstand Voltage:1000V AC/DC

Insulation Resistance:1000MΩ Min

Operation Temperature:-40°c to +105°c

Contact Material:Copper Alloy

Contact Plating:Au or Sn Over Ni

Insulator Material:Polyester(UL94V-0)

Resistance To Soldering Heat:

260°C±5°C, 10s(PA6T&PA9T&LCP insulator)

Ordering Information

PM 254 - * - N - S - * - BP - ** - * - P																	
No. of Rows 1=Single Row 2=Dual Row		No. of Pins 02-40Pin		Type (塑料) (塑料) (塑料) (塑料)	Length (mm)	Option Type BP=With Bump	Contact G0:Gold G1:1u" Gold G2:3u" Gold G3:5u" Gold G4:10u" Gold G5:15u" Gold G6:30u" Gold	Plating Flash	Packing R=Reel +Cap (编带+盖)	Post (焊脚)							

	GENERAL TOLERANCE		制图 DRAWING	 ShenzhenhuacantianluELECTRONICS CO.,LTD			
	DIM	TOL	审核 CHECK				
	X.X	±0.30	批准 APPROVAL	产品名称 TITLE	2.54双排 排母 贴片 带凸台 (塑高8.5) 编带+盖	版本 REV.	A
	X.XX	±0.20	比例 SCALE	产品料号 PART NO.	PM254-2-N-S-8.5-BP-XX-R (L8.9)	单位 UNITS	mm
1	初版发行	日期 MODIFY DATE	投影 Projection	材料 MATERIAL	页次 SHEET	1/1	
序号 No.	变更内容 MODIFY CONTENT						