

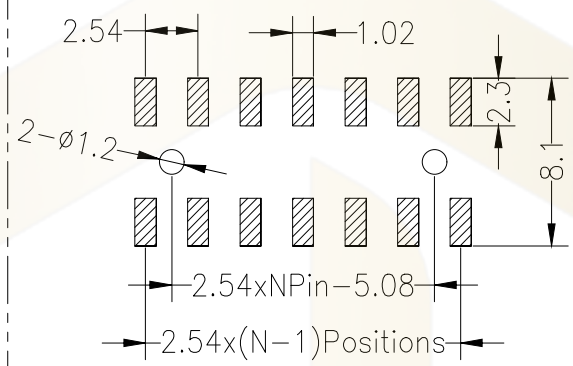
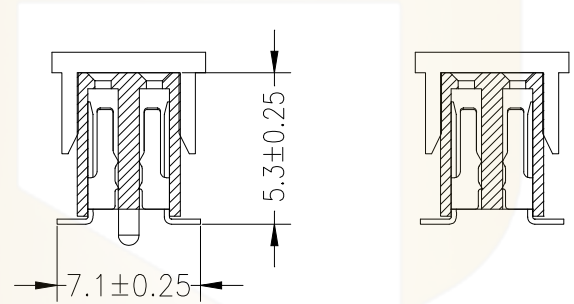
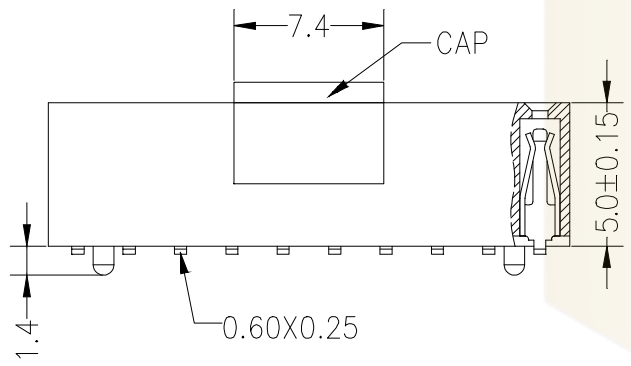


Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

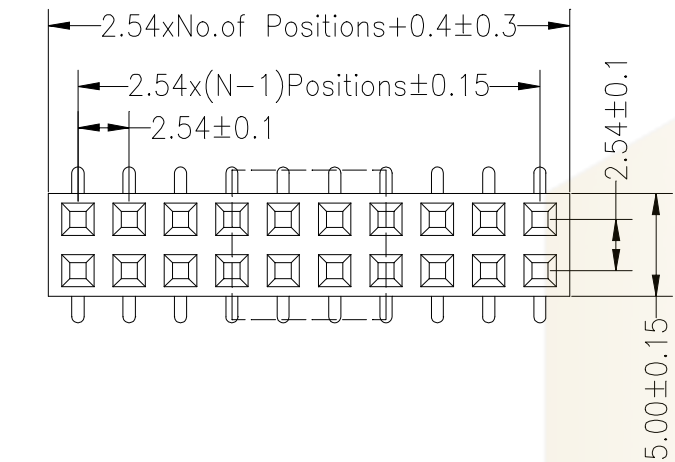

SPECIFICATIONS
Rated Current:3.0AMP
Contact Resistance:20mΩ Max
Withstand Voltage:1000V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:-40°c to +105°c

Contact Material:Brass
Contact Plating:Au or Sn Over Ni
Insulator Material:Polyester(UL94V-0)
Standard: PA6T
Max.Processing Temp: 230°C for 30-60 seconds
(260°C for 10 seconds)

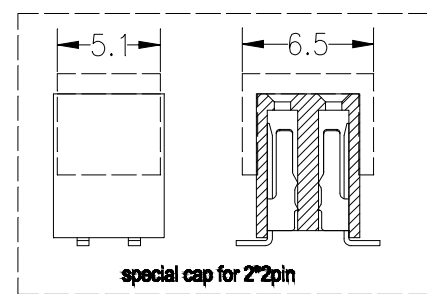

P = With Post 默认= W/O Post

Ordering Information

PM 254 - * - N - S - * - ** - * - P

No.of Rows 1=Single Row 2=Dual Row	No.of Pins 2-40Pin	Type 2-直插 8-弯插 S-立贴 R-带带	Length (mm)	Contact G0:Gold Flash G1:1u" Gold G2:3u" Gold G3:5u" Gold G4:10u" Gold G5:15u" Gold G6:30u" Gold S0:Gold Flash/Tin S1:Tin	Plating	Packing R=Reel +Cap (编带+盖)	Post (带柱)
--	-----------------------	--------------------------------------	----------------	--	---------	-------------------------------------	--------------

深圳市华灿天禄电子有限公司 工程专用章			GENERAL TOLERANCE		制 图 DRAWING	 深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO.,LTD			
			DIM	TOL	审 核 CHECK				
			X.X	±0.30	批 准 APPROVAL	产品名称 TITLE	2.54双排 排母 贴片 编带+盖 (塑高5.0)	版 本 REV.	A
			X.XX	±0.20	比 例 SCALE	产品料号 PART NO.	PM254-2-N-S-5.0-XX-R(L5.3)	单 位 UNITS	mm
			X.XXX	±0.10	投 影 Projection		材 料 MATERIAL	页 次 SHEET	1/1
1	初版发行	日期	Angle	±3.0°					
序号 No.	变更内容 MODIFY CONTENT	日期 MODIFY DATE							