
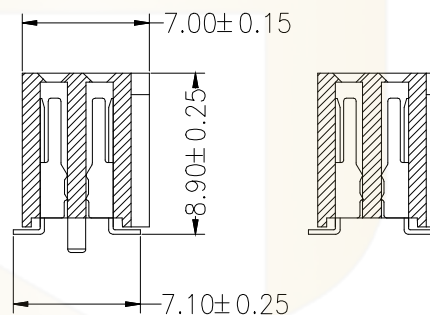
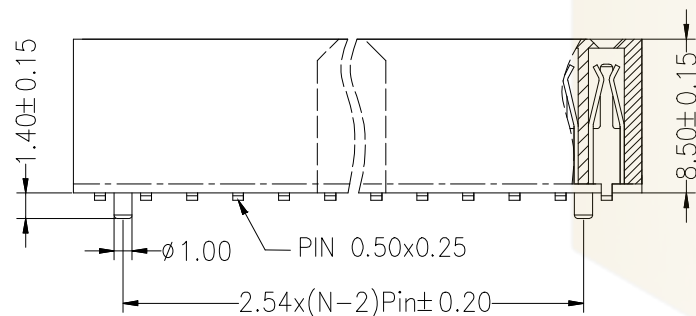




Operation Temperature: -40°C to $+105^{\circ}\text{C}$

260°C ± 5°C 10s (PA6T&LCP insulator)

Ordering Information

PM 254	- *	- N	- S	- *	- BP	- **	- P
No. of Rows 1=Single Row 2=Dual Row	No. of Pins 02~40Pin	Type Z=直針 S=彎針 WS=插針	Length (Plastic) (塑高)	Option Type BP=With Bump	Contact G0:Gold G1:1u" Gold G2:3u" Gold G3:5u" Gold G4:10u" Gold G5:15u" Gold G6:30u" Gold	Plating Flash Gold Gold Gold Gold Gold Gold	Post (塑柱)

			GENERAL TOLERANCE		制 图 DRAWING	 深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO., LTD				
			DIM	TOL	审 核 CHECK					
			X. X	±0.30	批 准 APPROVAL	产品名称 TITLE	2.54双排 排母 贴片 带凸台(塑高8.5)	版 本 REV.	A	
1 初版发行			X. XX	±0.20	比 例 SCALE	产品料号 PART NO.	PM254-2-N-S-8.5-BP-XX (L8.9)	单 位 UNITS	mm	
			X. XXX	±0.10	投 影 Projection		材 料 MATERIAL	页 次 SHEET	1/1	
序号 No.	变更内容 MODIFY CONTENT	日 期 MODIFY DATE	Angle	±3.0°						