

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE ± 0.05)

SPECIFICATIONS

Rated Current:3.0AMP

Contact Resistance:20m Ω Max

Withstand Voltage:1000V AC/DC

Insulation Resistance:1000M Ω Min

Operation Temperature:-40°C to +105°C

Contact Material:Copper Alloy





Contact Plating:Au or Sn Over Ni

Insulator Material:Polyester(UL94V-0)

Max.Processing Temp:

(PBT)245°C $\pm 5^\circ\text{C}$ For 5~10 Second

(PA6T/LCP/PA9T)260°C $\pm 5^\circ\text{C}$ For 5~10 Second

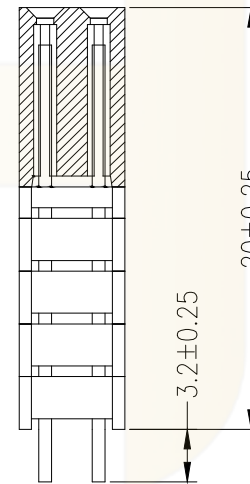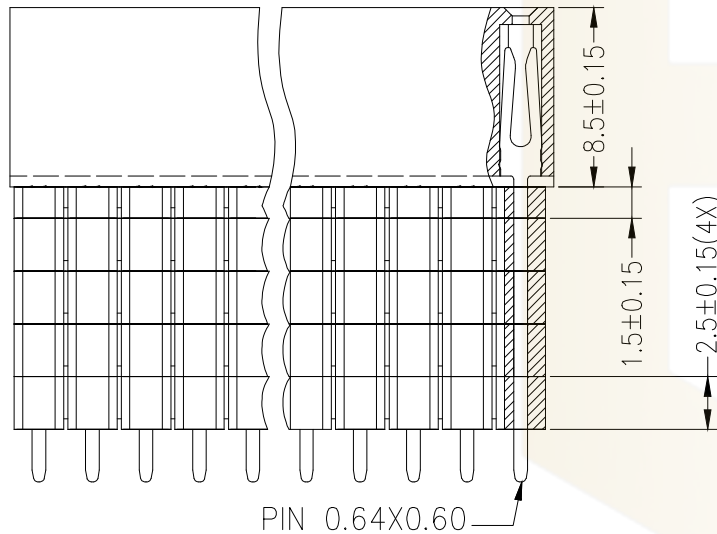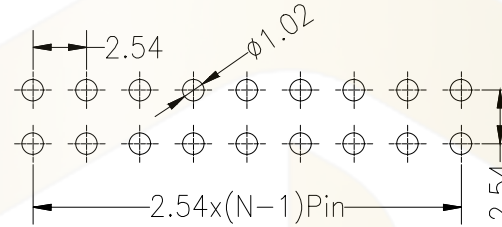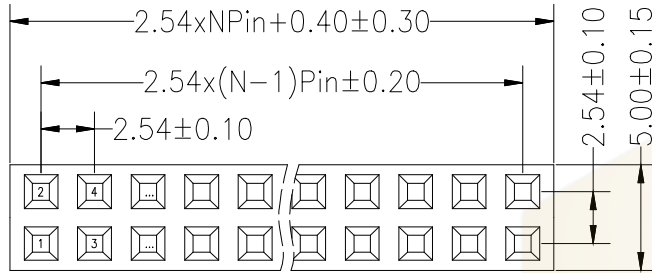

Ordering Information

PM 254	- *	- N	- Z	- C*	- **	- *LP
No. of Rows 1=Single Row 2=Dual Row	No. of Pins 02~40Pin	Type 2=直排 3=弯排 S=立贴 W=带插	Length (Plastic) (mm)	Contact Plating G0:Gold Flash G1:1u" Gold G2:3u" Gold G3:5u" Gold G4:10u" Gold G5:15u" Gold G6:30u" Gold S0:Gold Flash/Tin S1:Tin	1~5 Layer Of Plastic (叠加层塑胶)	

GENERAL TOLERANCE			制图 DRAWING		深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO., LTD			
DIM TOL			审核 CHECK		产品名称 TITLE	2.54双排 直排母(加5层塑胶)	版本 REV.	A
X.X ±0.30			批准 APPROVAL		产品料号 PART NO.	PM254-2-N-Z-C20.0-XX-5LP	单位 UNITS	mm
X.XX ±0.20			比例 SCALE		材料 MATERIAL		页次 SHEET	1/1
X.XXX ±0.10			投影 Projection					
Angle ±3.0°								
1	初版发行							
序号 No.	变更内容 MODIFY CONTENT	日期 MODIFY DATE						