

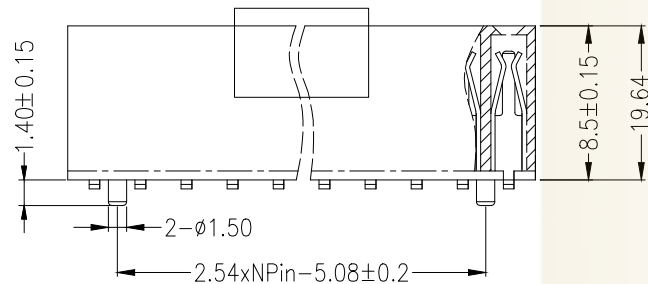
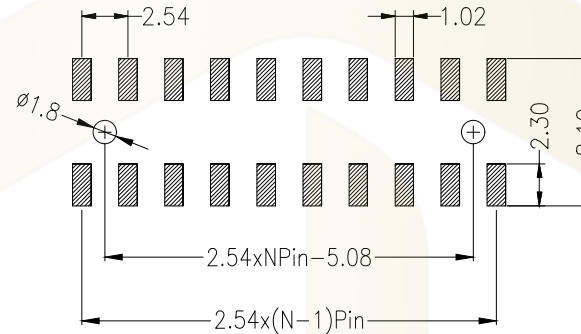



Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE ± 0.05)

SPECIFICATIONS
Rated Current:3.0AMP
Contact Resistance:20m Ω Max
Withstand Voltage:1000V AC/DC
Insulation Resistance:1000M Ω Min
Operation Temperature:-40°C to +105°C

Contact Material:Copper Alloy
Contact Plating:Au or Sn Over Ni
Insulator Material:Polyester(UL94V-0)
Resistance To Soldering Heat:
260°C $\pm 5^\circ\text{C}$, 10s(PA6T&PA9T&LCP insulator)

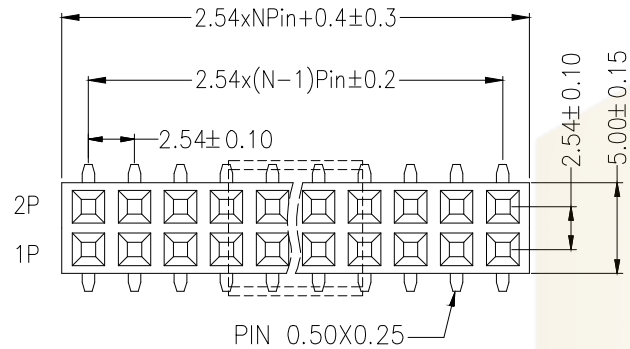

P=With Post



默认=W/O Post

Ordering Information

PM 254 - * - N - S - * - ** - * - P

No. of Rows 1=Single Row 2=Dual Row	No. of Pins 2=40Pin	Type 2=有针 4=有针 8=有针	Length (mm)	Contact Plating G0:Gold Flash G1:1u" Gold G2:3u" Gold G3:5u" Gold G4:10u" Gold G5:15u" Gold G6:30u" Gold S0:Gold Flash/Tin S1:Tin	Packing R=Reel +Cap (卷带+盖)	Post (焊脚)
---	------------------------	------------------------------	----------------	--	-------------------------------------	--------------

GENERAL TOLERANCE			制图 DRAWING		深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO., LTD			
DIM TOL			审核 CHECK		产品名称 TITLE	2.54双排 排母 贴片(塑高8.5)	版本 REV.	A
X.X ± 0.30			批准 APPROVAL		产品料号 PART NO.	PM254-2-N-S-8.5-XX(L9.1)	单位 UNITS	mm
X.XX ± 0.20			比例 SCALE		材料 MATERIAL		页次 SHEET	1/1
X.XXX ± 0.10			投影 Projection					
Angle $\pm 3.0^\circ$								
1	初版发行							
序号 No.	变更内容 MODIFY CONTENT	日期 MODIFY DATE						