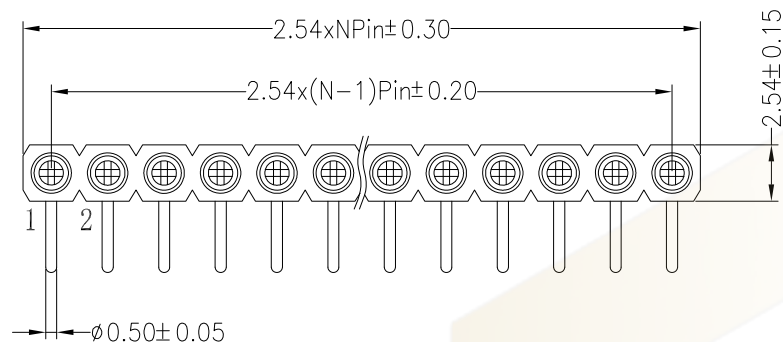


Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

SPECIFICATIONS

Current Rating:3.0AMP
Contact Resistance:10mΩ Max
Dielectric Strength:Min 1000V RMS
Mating Pin:Ø0.4 to Ø0.56mm
Forces:(polished steel gauge Ø0.43mm)
Operation Temperature:-40°C to +105°C

Sleeve:Brass
Contact Plating:Au Over Ni
Contact Clip(4 finger):Phosphor Bronze/BeCu
Insulator Material:Polyester(UL94V-0)
Standard: PPS
Soldering Temperature: 260°C±5° 5S

Ordering Information

PM 254 - * - N - W - * - ** - C						
No. of Rows 1=Single Row 2=Dual Row	No. of Pins 2~40Pin 每行Pin数 (mm/英寸)	Type 1=直针 2=弯针 针型图	Length (mm/英寸)	Contact G0:Gold G1:11μ" Gold G2:30μ" Gold G3:50μ" Gold G4:10μ" Gold G5:15μ" Gold G6:30μ" Gold S0:Gold Flash/Tin S1:Tin	Plating Flash	Round Pin (mm)

	GENERAL TOLERANCE		制图	深圳市华灿天禄电子有限公司 ShenzhenhuaciantianluELECTRONICS CO., LTD			
			DRAWING				
			DIM TOL	审核	产品名称	2.54 单排 排母 圆直针	版本
			X.X ±0.30	CHECK	TITLE	型高3.0 (L=5.85mm)	REV.
1	初版发行	日期	X.XX ±0.20	批准	产品料号	PM254-1-N-W-3.0-XX-C	单位
			X.XXX ±0.10	APPROVAL	PART NO.		UNITS
			Angle ±3.0°	比例	材料		页次
序号	变更内容	日期	投影	SCALE	MATERIAL		SHEET
No.	MODIFY CONTENT	MODIFY DATE	Projection				1/1