
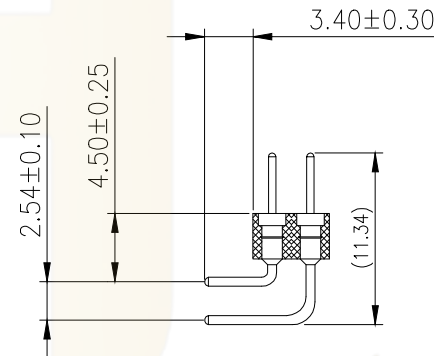
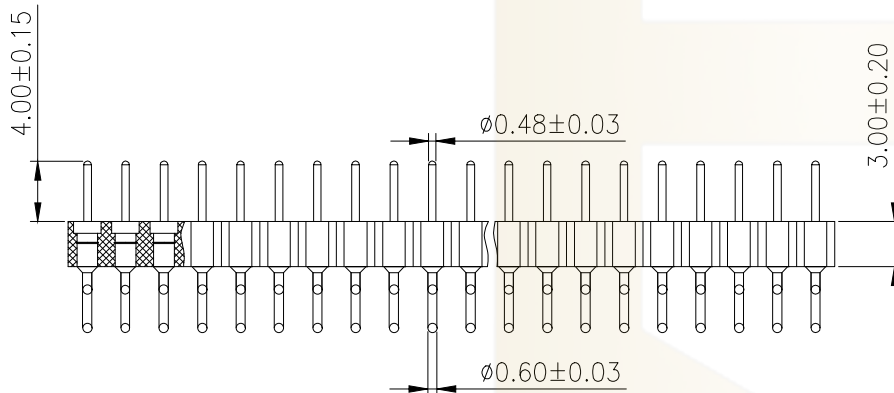


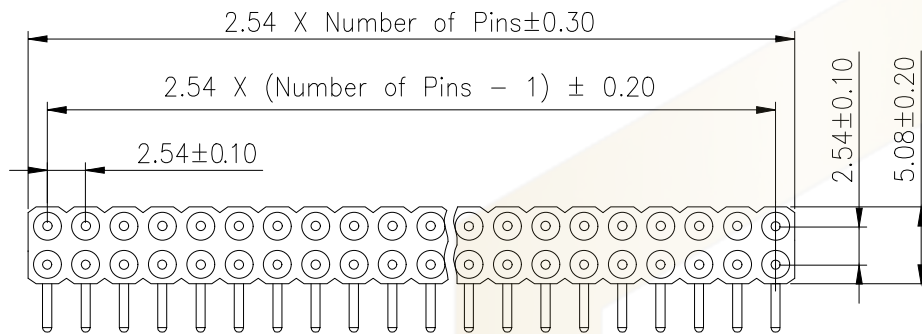

Materials

Pin: Brass, machined, (H59-3)
Plating: Gold plated: 1.25u"m/50"nickel, full gold
Insulator body (black): PPS (UL94V-O)

Electrical

Current rating: 3 Amps/contact max.
Contact resistance: 20mΩ
Insulation resistance: 1000mΩ
Operating voltage: 60 AC/DC

Mechanical

Operating temperature: Gold plated: -55°C to +105°C
(Continuous) -67°F to +105°F
Tin plated: -40°C to +105°C
Soldering temperature: 260°C, 10s max.

Ordering Information

PZ 254 - * - N - W - * - ** - C

No. of Rows
1=Single Row
2=Dual Row

No. of Pins
2-40Pin

Type
C: 0° (0°)
W: 30° (30°)
N: 60° (60°)

Length
(mm)

Contact Plating
G2: Gold Flash
G1: 1u" Gold
G2: 3u" Gold
G3: 5u" Gold
G4: 10u" Gold
G5: 15u" Gold
G6: 30u" Gold
SD: Gold Flash/Tin
S1: Tin

Round Pin
(0.001")



GENERAL TOLERANCE			制图	深圳市华灿天禄电子有限公司			
			DRAWING	ShenzhenhuacantianluELECTRONICS CO., LTD			
DIM	TOL	审核	批准	产品名称	2.54 圆弯针 双排 排针(塑高3.0)	版本	A
X. X	±0.30	CHECK	APPROVAL	TITLE		REV.	
X. XX	±0.20			PART NO.	PZ254-2-N-W-3.0-XX-C	UNITS	mm
X. XXX	±0.10			MATERIAL		SHEET	1/1
Angle	±3.0°		投影				