

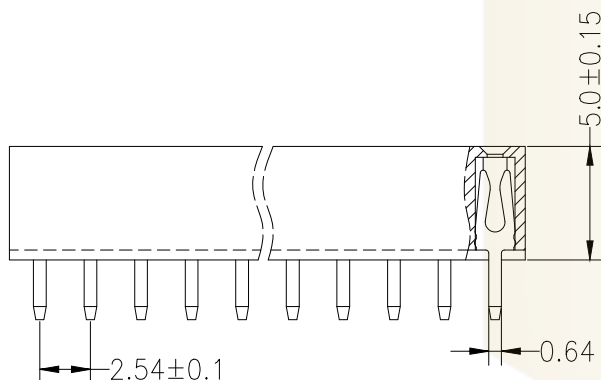
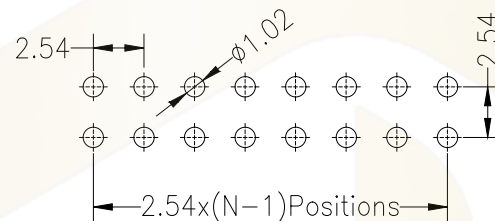


Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE ± 0.05)

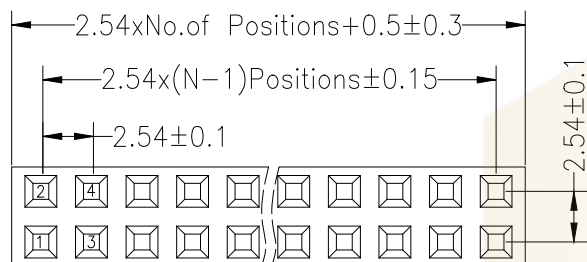

SPECIFICATIONS

Rated Current:3.0AMP

Contact Resistance:20m Ω Max

Withstand Voltage:1000V AC/DC

Insulation Resistance:1000M Ω Min

Operation Temperature:-40°C to +105°C

Contact Material:Copper Alloy

Contact Plating:Au or Sn Over Ni

Insulator Material:Polyester(UL94V-0)

Standard: PA6T

Max.Processing Temp: 260°C $\pm 5^{\circ}\text{C}$ 5S

Ordering Information

PM 254 - * - N - Z - * - **

No.of Rows
1=Single Row
2=Dual Row

No.of Pins
2-40Pin

Type
Z=直针
B=弯针
S=带轴
R=带轴

Length
(英寸)

Contact Plating
G0:Gold Flash
G1:1u" Gold
G2:3u" Gold
G3:5u" Gold
G4:10u" Gold
G5:15u" Gold
G6:30u" Gold
S0:Gold Flash/Tin
S1:Tin

	GENERAL TOLERANCE		制 图				
			DRAWING				
		DIM	TOL	审 核	产品名称 TITLE		
		X. X	± 0.30	CHECK			
		X. XX	± 0.20	批 准	产品料号 PART NO.		
		X. XXX	± 0.10	APPROVAL			
		Angle	$\pm 3.0^{\circ}$	比 例	材料 MATERIAL		
				SCALE			
1	初版发行	日期		投 影	页 次 SHEET		
序号 No.	变更内容 MODIFY CONTENT	MODIFY DATE		Projection			