

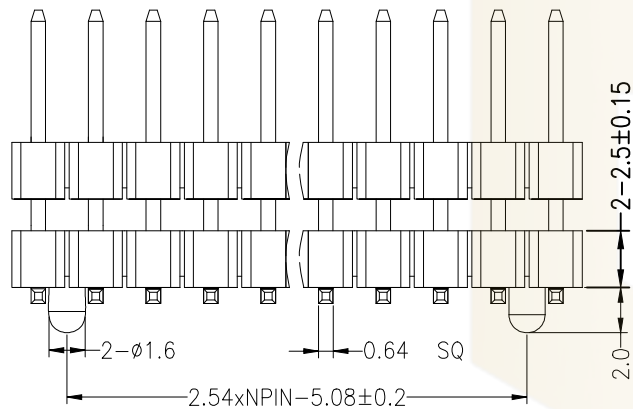


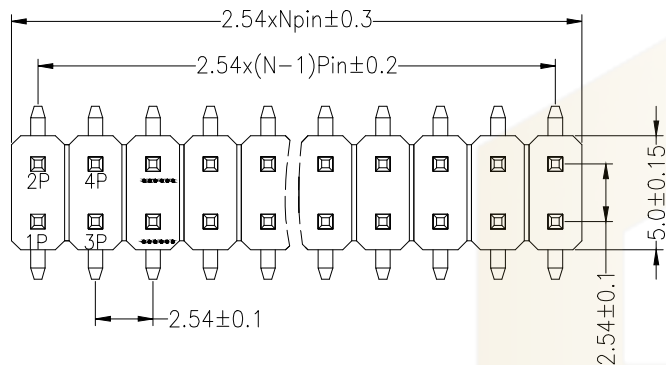

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

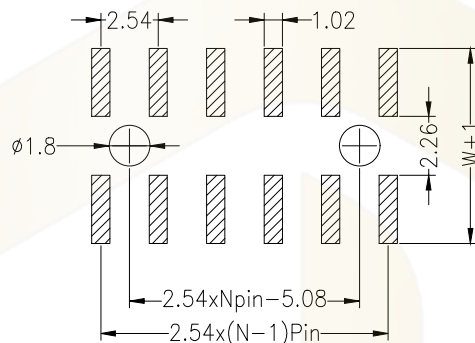

SPECIFICATIONS

Rated Current:3.0AMP

Contact Resistance:20mΩ Max

Withstand Voltage:1000V AC/DC

Insulation Resistance:1000MΩ Min

Operation Temperature:-40°c to +105°c

Contact Material:Brass

Contact Plating:Au or Sn Over Ni

Insulator Material:Polyester(UL94V-0)

Standard: PA6T

Max.Processing Temp: 230°C for 30-60 seconds
(260°C for 5 seconds)

Dimension antitheses list

ITEM	PA	PC	C	W	L
Standard	4.00	3.20	11.50	7.50	16.20
Alternate					

Ordering Information

PZ 254 - * - N - S - C* - ** - DP - P

No.of Rows
1=Single Row
2=Dual Row

No.of Pins
2-40Pin

Type
2-直插
3-贴片
4-插板

Length
(mm)

Contact
G0:Gold
G1:1u" Gold
G2:3u" Gold
G3:5u" Gold
G4:10u" Gold
G5:15u" Gold
G6:30u" Gold
S0:Gold Flash/Tin
S1:Tin

Plating
G0:Gold
G1:1u" Gold
G2:3u" Gold
G3:5u" Gold
G4:10u" Gold
G5:15u" Gold
G6:30u" Gold
S0:Gold Flash/Tin
S1:Tin

Dual Plastic
(双塑)

Post
(带针)



GENERAL TOLERANCE		制 图	深圳市华灿天禄电子有限公司	
DIM TOL		DRAWING	ShenzhenhuacantianluELECTRONICS CO.,LTD	
X.X	±0.30	审 核	产品名称	2.54 双排双塑 排针 贴片
X.XX	±0.20	批 准	产品料号	PZ254-2-N-S-C11.5-XX-DP(L16.2)
X.XXX	±0.10	比 例	材料	
Angle	±3.0°	SCALE	版 本	REV. A
投影		Projection	单 位	mm
序号	变更内容	日期	页 次	1/1
No.	MODIFY CONTENT	MODIFY DATE	SHEET	