

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE ± 0.05)

SPECIFICATIONS

Rated Current:3.0AMP

Contact Resistance:20m Ω Max

Withstand Voltage:1000V AC/DC

Insulation Resistance:1000M Ω Min

Operation Temperature:-40°C to +105°C





Contact Material:Copper Alloy

Contact Plating:Au or Sn Over Ni

Insulator Material:Polyester(UL94V-0)

Standard: PA6T

Max.Processing Temp: 260°C $\pm 5^{\circ}\text{C}$ 5S

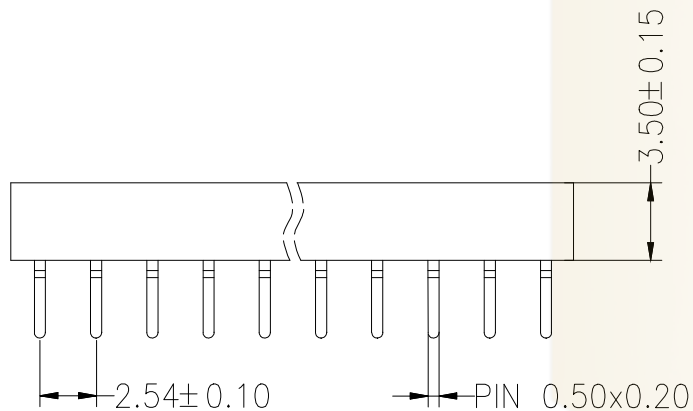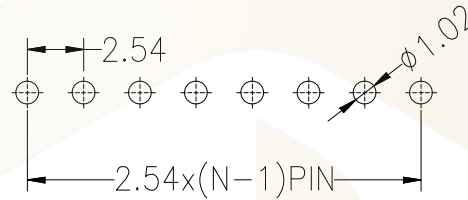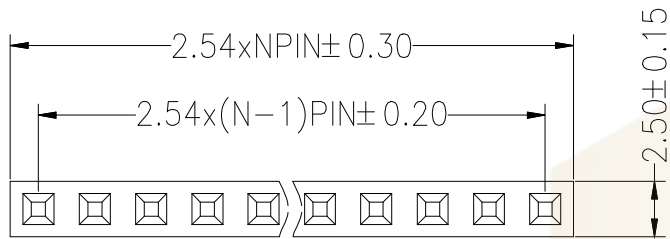

Ordering Information

PM 254 - * - N - Z - * - **

No. of Rows
1=Single Row
2=Dual Row

No. of Pins
02-40Pin

Type
2=塑料
3=陶瓷
4=金属
5=塑料

Length
(Plastic)
(mm)

Contact Plating
G0:Gold Flash
G1:1u" Gold
G2:3u" Gold
G3:5u" Gold
G4:10u" Gold
G5:15u" Gold
G6:30u" Gold



			GENERAL TOLERANCE		制 图 DRAWING	深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO., LTD			
			DIM	TOL	审 核 CHECK				
			X. X	± 0.30	批 准 APPROVAL	产 品 名 称 TITLE	2.54单排 直排母 塑高3.5	版 本 REV.	A
1	初版发行		X. XX	± 0.20	比 例 SCALE	产 品 料 号 PART NO.	PM254-1-N-Z-3.5-XX (L7.0)	单 位 UNITS	mm
序号 No.	变更内容 MODIFY CONTENT	日 期 MODIFY DATE	X. XXX	± 0.10	投 影 Projection	材 料 MATERIAL		页 次 SHEET	1/1
			Angle	± 3.0°	