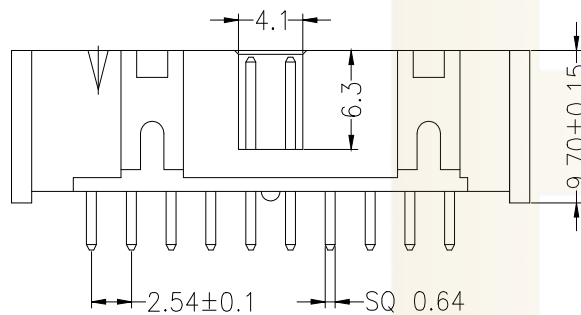
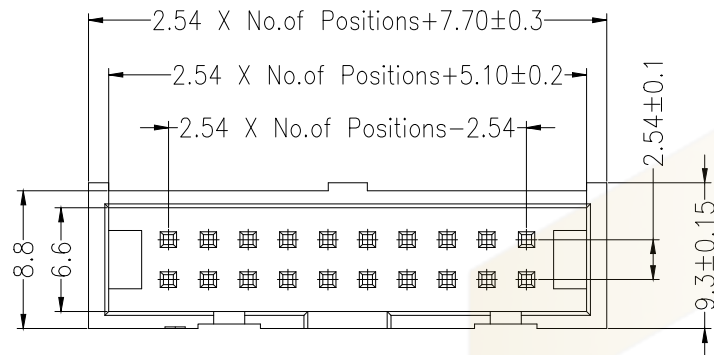


Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

SPECIFICATIONS

Rated Current:3.0AMP

Contact Resistance:20mΩ Max

Withstand Voltage:1000V AC/DC

Insulation Resistance:1000MΩ Min

Operation Temperature:-40℃ to +105℃

Contact Material:Brass

Contact Plating:Au or Sn Over Ni

Insulator Material:Polyester(UL94V-0)

Standard: PBT

Max.Processing Temp: 180℃ for 30-60 seconds
(230℃ for 10 seconds)

Ordering Information

HC-JN 254 - * - N - Z - * - **

No. of Rows
1=Single Row
2=Dual Row

No. of Pins
08-64Pin

Type
2-11Pin
4-10Pin

Length
(Plastic)
(mm)

Contact Plating
G0:Gold Flash
G1:1u" Gold
G2:3u" Gold
G3:5u" Gold
G4:10u" Gold
G5:15u" Gold
G6:30u" Gold
S0:Gold Flash/Tin
S1:Tin



GENERAL TOLERANCE			制图	深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO., LTD		
			DRAWING			
	DIM	TOL	审核	产品名称	筒牛2.54 双排 直针	版本
	X. X	±0.30	CHECK	TITLE		REV.
	X. XX	±0.20	批准	产品料号	HC-JN254-2-N-Z-9.7-XX	单位
	X. XXX	±0.10	APPROVAL	PART NO.		UNITS
1	初版发行		比例	材料		页次
序号	变更内容	日期	SCALE	MATERIAL		SHEET
No.	MODIFY CONTENT	MODIFY DATE	Angle			
			±3.0°			
			投影			
			Projection			