


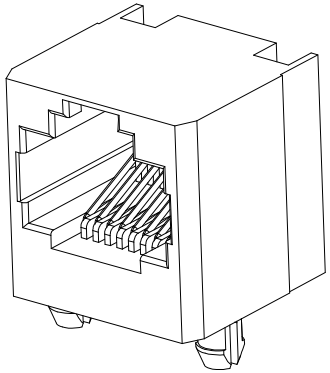

SPECIFICATIONS :

MATERIAL:

1.HOUSING MATERIAL: GLASS FILLED PBT(UL94V-0). Colour: Gray

2.CONTACT MATERIAL: PHOSPHOR BRONZE Φ0.46MM.

3.PLATING: GOLDFLASH PLATING AND NICKEL PLATING

OVERALL

ELECTRICAL:

1.VOLTAGE RATING: 125Vac RMS .

2.CURRENT RATING: 1.5AMP .

3.CONTACT RESISTANCE: 30mΩ MAX .

4.INSULATION RESISTANCE: 500MΩ MIN .

5.DIELECTRIC WITHSTANDING VOLTAGE: 1000V

MECHANICAL:

1.DURRABILITY : 750 CYCLES MIN.


2.INSETION FORCE: 2.2Kgf MAX.


3.RETENTION STRENGTH : 7.7Kgf MIN


ENVIRONMENTAL:

1.STORAGE TEMPRATURE : -40℃ TO 85℃.

2.OPERATION TEMPRATURE : -40℃ TO 85℃.

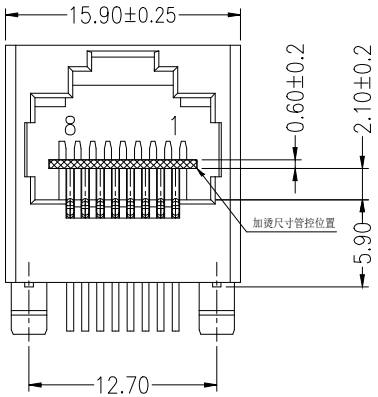

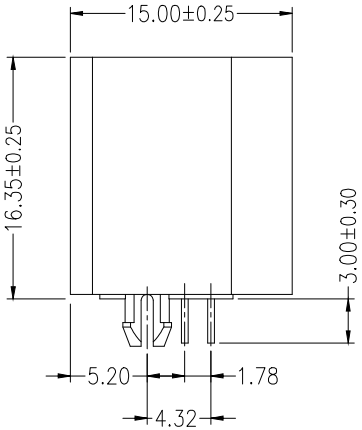

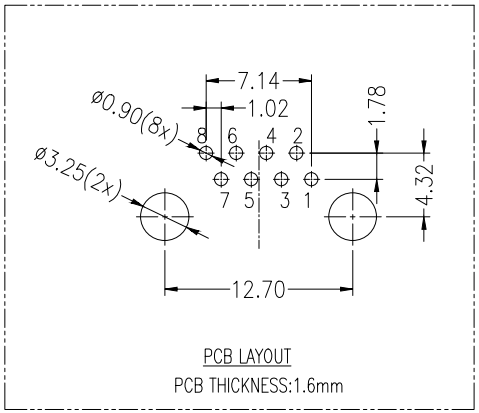

			GENERL TOLERANCE	制 图 DRAWING	04	深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO.,LTD			
			DIM TOL	审 核 CHECK					
			X.X ±0.30	批 准 APPROVAL		产品名称 TITLE	网络插座 (16H 全塑无灯)	版 本 REV.	A
1	初版发行		X.XX ±0.20	比 例 SCALE		产品料号 PART NO.	HC-RJ45-5JB-1-6	单 位 UNITS	mm
序号 No.	变更内容 MODIFY CONTENT	日 期 MODIFY DATE	X.XXX ±0.10 Angle ±3.0°	投 影 Projection		材 料 MATERIAL		页 次 SHEET	1/1