





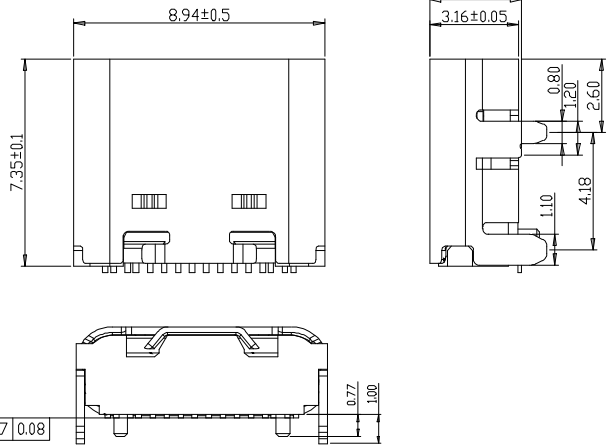

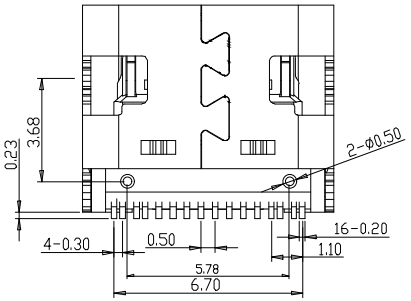







SPECIFICATIONS:


1. ELECTRICAL CHARACTERISTICS:
   - 1-1. CONTACT RESISTANCE: 30mΩMAX.
   - 1-2. DIELECTRIC WITHSTANDING VOLTAGE: 100V AC FOR ONE MINUTE.
   - 1-3. INSULATION RESISTANCE: 100MΩMIN. MEASURED BY 500 VDC
2. MECHANICAL CHARACTERISTICS:
   - 2-1. INSERTION FORCE :0.5-2.0Kgf(REF.)
   - 2-2. WITHDRAWAL FORCE :0.8-2.0Kgf(REF.)
3. LIFE TEST: 10,000 CYCLES.
4. TO CONFORM TO THE KRCONN HAZARDOUS SUBSTANCE FREE SPEC.

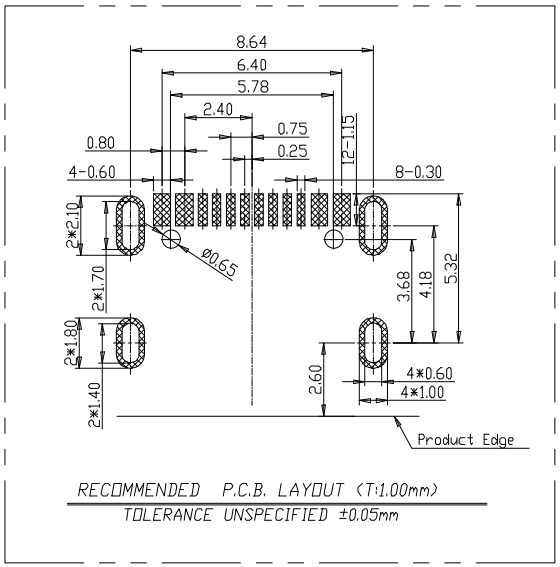

RECOMMENDED P.C.B. LAYOUT (T:1.00mm)

TOLERANCE UNSPECIFIED ±0.05mm

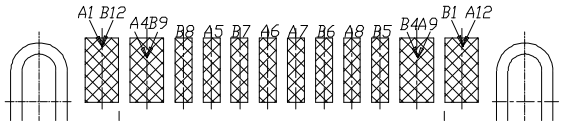

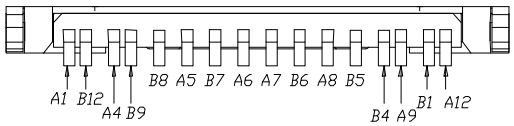

P/N	(L)	(F)脚长	COLOER	额定电流
HC-TYPE-C-16P-01B-5A-O-29	7.35mm	1.00mm	橙色	5A
HC-TYPE-C-16P-01B-5A-B-29	7.35mm	1.00mm	蓝色	5A

Ordering Information

HC-TYPE-C - 16P - 01B - *A - * - 29

- Pin: 4P, 6P, 8P, 12P, 16P, 24P
- Type: 01B=Top Mount (夹上)
- Current Rated: 3A, 5A, 10A
- Colour (默认:Black): W=White, B=Blue, G=Green, O=Orange, P=Purple, Y=Yellow

			GENERL TOLERANCE					
			DIM	TOL	制 图 DRAWING		深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO.,LTD	
					审 核 CHECK			
			X.X	±0.30	批 准 APPROVAL		产品名称 TITLE	TYPE C F 16P TOP MOUNT (L=7.35) WITH POST (单排 板上 带柱 四脚插板)
			X.XX	±0.20	比 例 SCALE		产品料号 PART NO.	HC-TYPE-C-16P-01B-5A-X-29
1	初版发行		X.XXX	±0.10	投 影 Projection		材 料 MATERIAL	
序号 No.	变更内容 MODIFY CONTENT	日 期 MODIFY DATE	Angle	±3.0°				

版 本 REV.	A
单 位 UNITS	mm
页 次 SHEET	1/3