
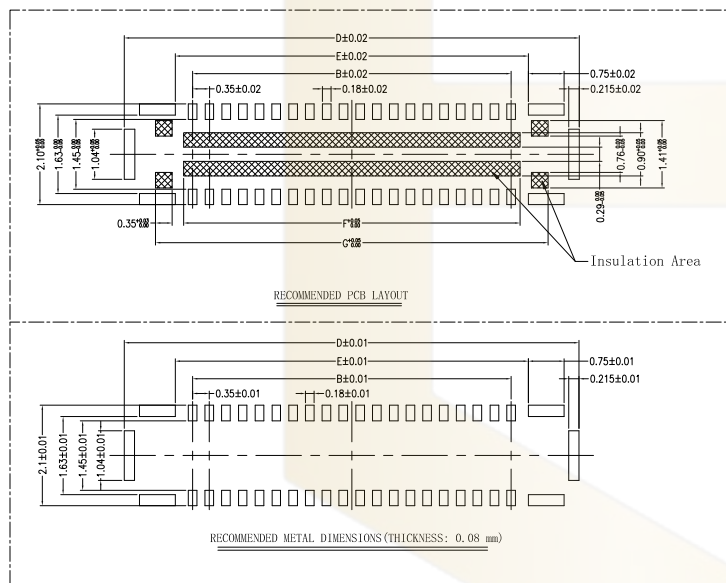










1. VOLTAGE: 30V AC/DC
2. CURRENT: 0.3A/SIGNAL CONTACT, 7A/POWER CONTACT
3. OPERATION TEMPERATURE: -40°C TO +85°C
4. CONTACT RESISTANCE: 90mΩ/SIGNAL CONTACT,
30mΩ/POWER CONTACT
5. INSULATION RESISTANCE: 50mΩ MIN INITIAL.
6. DIELECTRIC WITHSTANDING VOLTAGE: 100V AC FOR ONE MINUTE
7. DURABILITY: 30 CYCLES
8. IR REFLOW CYCLE: 2 CYCLES MAX.

No. of PIN	DIM						
	A	B	C	D	E	F	G
06PIN	3.30	0.70	1.62	3.545	1.42	1.07	2.22
10PIN	4.00	1.40	2.32	4.245	2.12	1.77	2.99
12PIN	4.35	1.75	2.67	4.595	2.47	2.12	3.33
16PIN	5.05	2.45	3.37	5.295	3.17	2.82	4.03
24PIN	6.45	3.85	4.77	6.695	4.57	4.22	5.43
30PIN	7.50	4.90	5.82	7.745	5.62	5.27	6.43
32PIN	7.85	5.25	6.17	8.095	5.97	5.62	6.83
34PIN	8.20	5.60	6.52	8.445	6.32	5.97	7.17
40PIN	9.25	6.65	7.57	9.495	7.37	7.02	8.22
48PIN	10.65	8.05	8.97	10.895	8.77	8.42	9.63
50PIN	11.00	8.40	9.32	11.245	9.12	8.77	9.97
60PIN	12.75	10.15	11.07	12.995	10.87	10.52	11.17

HC-PBB13C - N** - 0.35V - ** - 07

No. of Pins	Nature	PITCH	Stacking Height (H)
06-60Pin	DP=Male	0.35V=0.35mm	
06=6Pin	DS=Female		0.6=0.6mm
12=12Pin			


			GENERAL TOLERANCE	制 图 DRAWING	 深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO.,LTD				
			DIM TOL	审 核 CHECK					
			X.X ±0.30	批 准 APPROVAL	产品名称 TITLE	0.35 单槽 1贴 座母 (BTB)	版本 REV.	A	
			X.XX ±0.20	比 例 SCALE	产品料号 PART NO.	HC-PBB13C-NSD-0.35V-0.6-07	单位 UNITS	mm	
1	初版发行		X.XXX ±0.10	投 影 Projection		材 料 MATERIAL	页 次 SHEET	1/2	
序号 No.	变更内容 MODIFY CONTENT	日 期 MODIFY DATE	Angle ±3.0°						

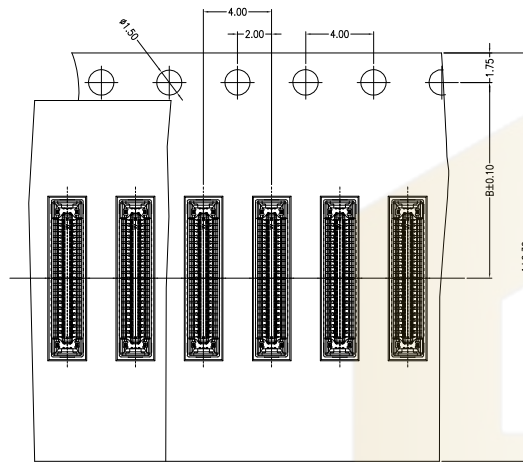

PER REEL 15000 CONNECTORS

TABLE

No. of PIN	DIM						
	A	B	C	D	E	F	G
06PIN	12.0	5.5	3.4	13.5	17.5	330	80
10PIN	16.0	7.5	4.1	17.5	21.5	330	80
12PIN	16.0	7.5	4.45	17.5	21.5	330	80
16PIN	16.0	7.5	5.15	17.5	21.5	330	80
24PIN	16.0	7.5	6.55	17.5	21.5	330	80
30PIN	16.0	7.5	7.60	17.5	21.5	330	80
32PIN	24.0	11.5	7.95	25.5	29.5	330	80
34PIN	24.0	11.5	8.30	25.5	29.5	330	80
40PIN	24.0	11.5	9.35	25.5	29.5	330	80
48PIN	24.0	11.5	10.75	25.5	29.5	330	80
50PIN	24.0	11.5	11.1	25.5	29.5	330	80
60PIN	24.0	11.5	12.85	25.5	29.5	330	80

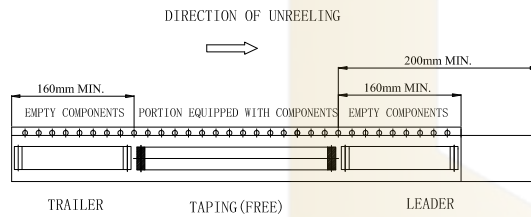

			GENE RL TOLERANCE	制 图 DRAWING		深圳市华灿天禄电子有限公司 ShenzhenhuacantianlueELECTRONICS CO., LTD			
			DIM TOL	审 核 CHECK		产品名称 TITLE	0.35 单槽 立贴 母座 (BTB) 包装图	版 本 REV.	A
			X. X ±0.30	批 准 APPROVAL		产品料号 PART NO.	HC-PBB13C-NDS-0.35V-0.6-07	单 位 UNITS	mm
1	初版发行		X. XX ±0.20	比 例 SCALE		材料		页 次 SHEET	2/2
序号 No.	变更内容 MODIFY CONTENT	日 期 MODIFY DATE	Angle ±3.0°	投 影 Projection					